


OBZOR

switches & sockets

**technical
catalogue**

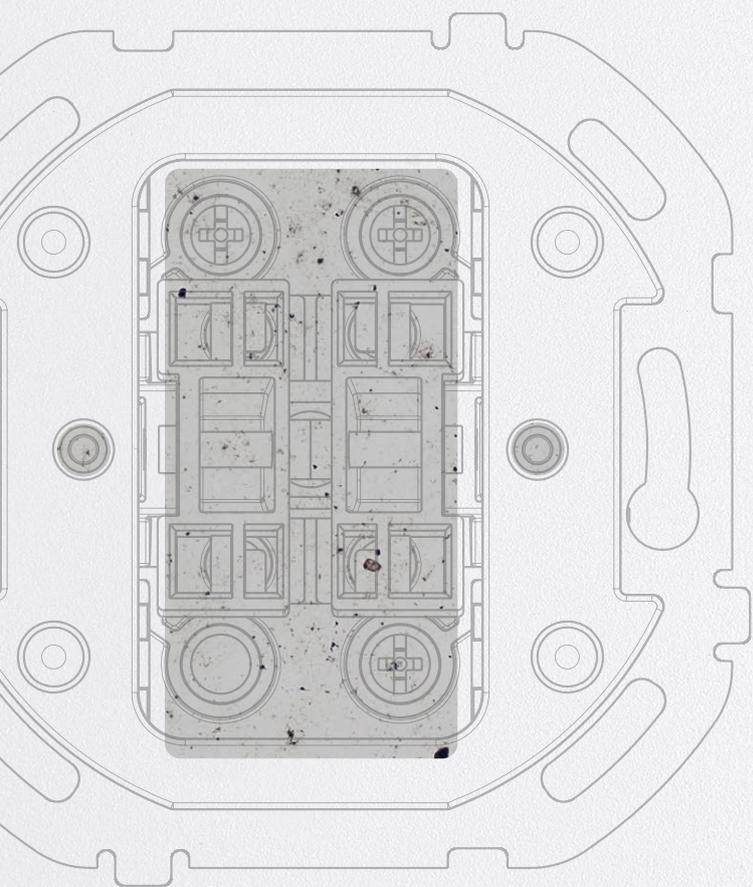

O3ZOR

switches & sockets
made in Czech Republic

content

| | |
|--|----|
| about us | 4 |
| avant | 9 |
| nexa | 15 |
| retro | 25 |
| decente | 39 |
| decente hotel systems | 48 |
| elegant | 51 |
| elegant aqua IP 44 | 62 |
| elegant vacuum sockets | 64 |
| elegant medical | 67 |
| thermostats and motion sensors | 71 |
| passive switches for intelligent systems | 74 |
| accessories | 76 |
| wiring diagrams | 78 |
| technical drawings | 80 |

obzor

... tradition since 1965

OBZOR company was founded sixty years ago. During this time the company has established among the top manufacturers and distributors of small electromechanical products, automotive parts, metal and injection moulding parts. Year 2000 can be considered as the beginning of development and subsequent production of wiring products such as switches, sockets, drivers and more.

- Czech tradition, 100% ownership rooted in tradition, owned fully in Czech hands
- stability and quality
- traditional Czech manufacturer of cam switches, house wiring and accessories
- socially responsible company
- major supplier of plastic parts for automotive
- top equipment
- assembly of products

**product lines****elegant** / since 2003

A product line with a classic, unobtrusive design that offers a wide range of colours and combinations. The unique design of the frame allows two colours to be combined — one on the side segment and one on the base segment of the frame. An unusual frame-joining concept also makes it possible to create vertical, modular, or even up to seven times horizontal combinations.

- The product range includes**
- switches, sockets, controllers
 - vacuum sockets
 - aqua sockets and switches with IP 44 protection
 - thermostats, PIR sensors
 - medical series sockets for healthcare industry

product lines**decente** / since 2011

This timeless product line uses natural noble materials – glass, wood, metal, concrete and plexiglass. These prime frames can be combined up to four-fold horizontal and vertical. Between 2014–2015, Decente range has expanded with new glass frame colours, matt frames, and more affordable PLEXIGLASS version in white or black.

- The product range includes**
- switches, sockets, controllers
 - thermostats, PIR sensors
 - passive switches for smart home systems
 - data sockets
 - DECENTE hotel systems

retro / since 2017

Switches of RETRO line feature an original design inspired by rotary switches from the 1930s and unique functionalist architecture of Zlín city. Round frames are made of solid wood, ceramics, glass or concrete and are also available in horizontal / vertical double or triple versions. Switches are controlled by an unusual handle. They are suitable not only for rustic, but also for minimalist and industrial interiors. RETRO series contains wide range of fittings according to current standards for a comfortable living.

- The product range includes**
- switches, sockets, controllers
 - data sockets
 - thermostats and motion sensors

nexa rondo / since 2024**nexa quadro** / since 2026

A new series that builds on the successful RETRO toggle switches. The biggest difference is the material used - timeless and always elegant glass in black and white. It also differs from the existing frames in size and strength. Compared to the original thickness of 13.5 millimetres, it is now only eight millimetres thick. For lovers of natural design, the wood frames are available in maple and oak.

- The product range includes**
- switches, sockets, controllers
 - data sockets
 - thermostats
 - passive switches for smart home systems

avant / since 2025



Avant is an innovative range of switches designed for those who want to combine modern design with maximum practicality. Elegant shapes, quality materials and easy operation make every press a pleasant experience. The switch frames are made of high-quality aluminium, ensuring not only durability but also adding a light aesthetic element to every room.

- The product range includes**
- switches, sockets, controllers
 - data sockets
 - thermostats
 - passive switches for smart home systems


assembly of fittings composition of ordering code

In case of a demand of a single frame set, fittings can be specified by a composite assembly code with the following definition:



elegant

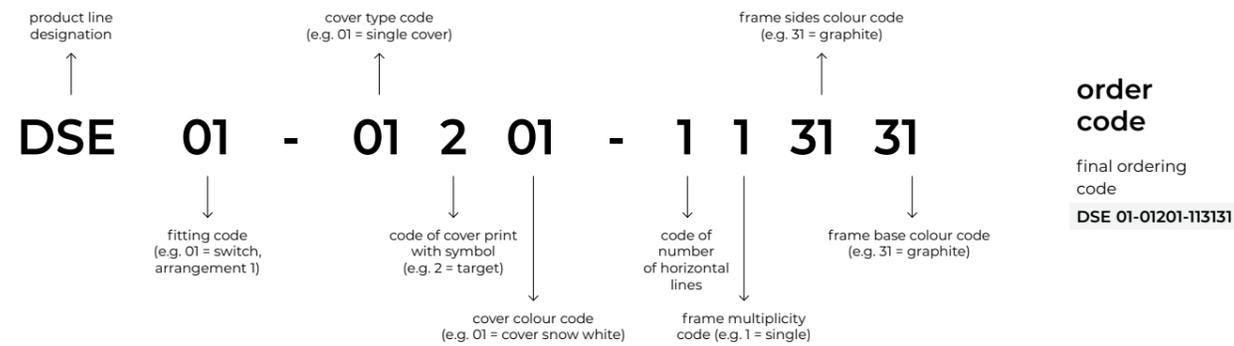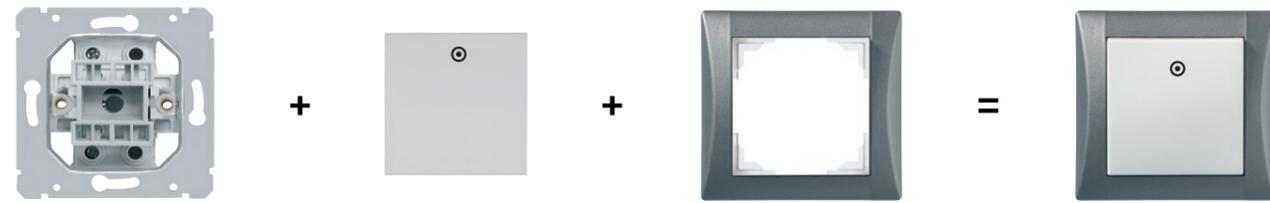


retro

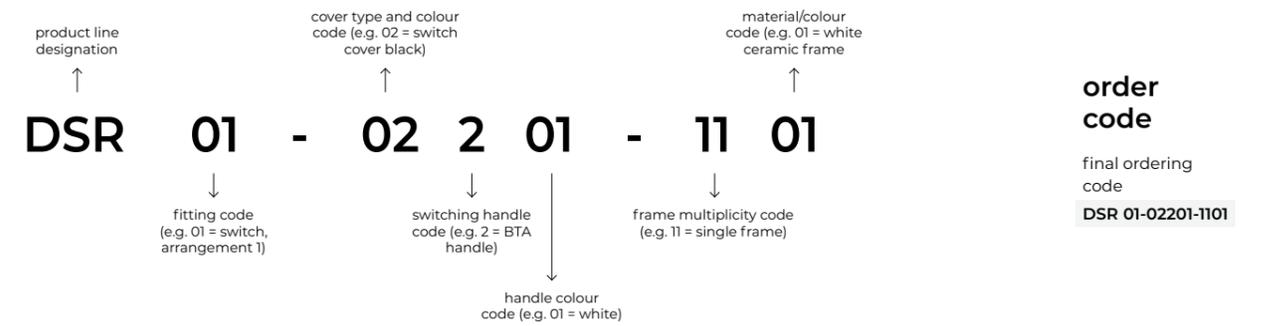


decente

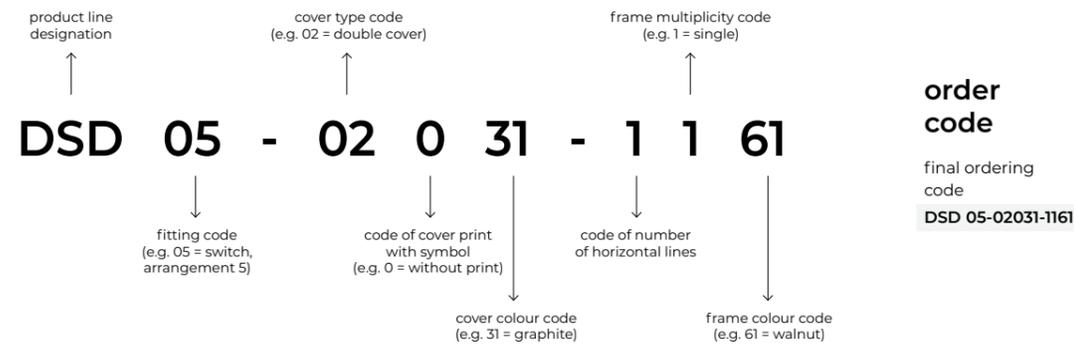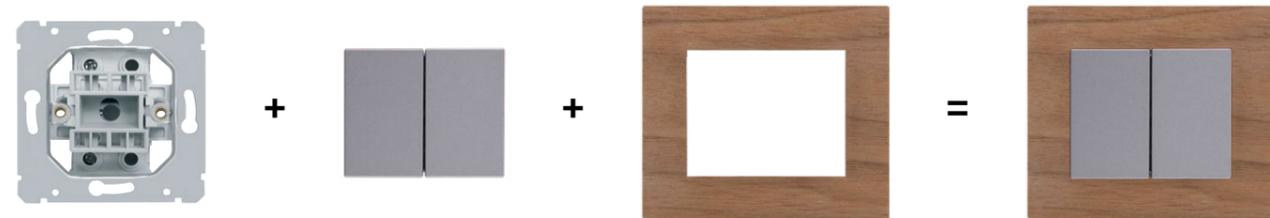

nexa

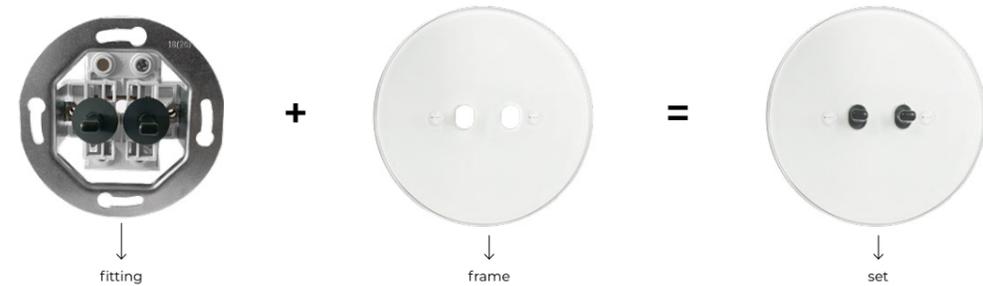

avant

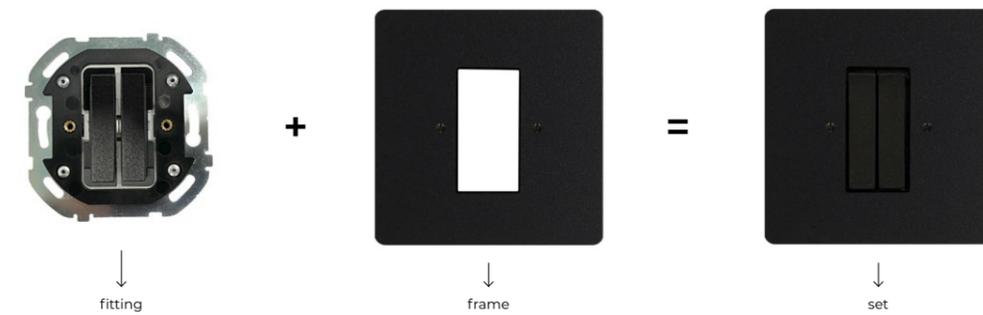

NEXA and AVANT fittings and frames need to be ordered separately as there is no possibility to create codes for sets.



avant

*unconventional
design*



Avant is an innovative range of switches, designed for those who want to combine modern design with maximum practicality. Elegant shapes, quality materials and easy operation make every press a pleasant experience. The switch frames are made of high-quality aluminium, ensuring not only durability but also adding a light aesthetic element to every room.

aluminium collection

A new design series of switches and sockets, that thanks to progressive sockets, will elevate your space to a new level and highlight the beauty of modern interiors, thanks to progressive craftsmanship. The main design feature is the rocker switch control, which gives the switches a sophisticated look while allowing comfortable and intuitive control of the lights.



aluminium white frame / rocker switch control white



aluminium black frame / rocker switch control black



aluminium black frame / sockets cover black matt

sets



single toggle switch (arrangement 1, 2, 6, 7, 1/0), press button up to 24V



single toggle switch (arrangement 5, 6+6, 1/0+1/0), shutter switch, press button up to 24V



single sockets



schuko single sockets



TV + SAT sockets



2x PC sockets



2x USB-A charging sockets



USB-A + USB-C charging sockets



2x USB-C charging sockets



USB-A charging sockets



EBERLE digital thermostat universal (application as floor and combined, it is necessary to buy a sensor)



EBERLE analogue ROOM / FLOOR thermostat under plaster mounting (with sensor)

covers



01 white
35 white matt



02 black
34 black matt

frames

aluminium



01 white



02 black

metal



01 white



02 black

rocker switch controls



* Illustrative photo - any data connector can be selected from the range Accessories.

frame multiplicities

| | | | | | | |
|--|---|---|---|---|--|------------------------------|
|  |  |  |  |  |  | dimensions (h*w) 90*90 mm |
| DSA RA-10000-11xx | DSA RA-20000-11xx | DSA RA-30000-11xx | DSA RA-40000-11xx | DSA RA-50000-11xx | DSA RA-60000-11xx | |
| | | | frame for data socket | frame for 2* data sockets | frame for blind cover | |
|  | | | | | | |
| DSA RA-T0000-11xx | | | | | | |
| frame for thermostat | | | | | | |

horizontal

| | | | | | | |
|--|---|---|---|---|-------------------------------|-------------------------------|
|  |  |  |  |  | dimensions (h*w) 90*161 mm | |
| DSA RA-11000-12xx | DSA RA-22000-12xx | DSA RA-33000-12xx | DSA RA-12000-12xx | DSA RA-13000-12xx | | |
|  |  |  | | | | dimensions (h*w) 90*232 mm |
| DSA RA-11100-13xx | DSA RA-33300-13xx | DSA RA-13300-13xx | | | | |

vertical

| | | | | | |
|--|---|---|---|---|------------------------------|
|  |  |  |  |  | dimensions (h*w) 161*90mm |
| DSA RA-11000-21xx | DSA RA-22000-21xx | DSA RA-33000-21xx | DSA RA-12000-21xx | DSA RA-13000-21xx | |

Other combinations of multiple frames can be custom made.

horizontal | custom made

| | | | | | |
|--|---|---|---|---|-------------------------------|
|  |  |  |  |  | dimensions (h*w) 90*161 mm |
| DSA RA-24000-12xx | DSA RA-23000-12xx | DSA RA-44000-12xx | DSA RA-14000-12xx | | |
|  |  |  |  |  | dimensions (h*w) 90*232 mm |
| DSA RA-22300-13xx | DSA RA-11400-13xx | DSA RA-11300-13xx | DSA RA-33400-13xx | DSA RA-44400-13xx | |
|  |  |  |  |  | |
| DSA RA-22200-13xx | DSA RA-23300-13xx | DSA RA-24300-13xx | DSA RA-14300-13xx | DSA RA-12400-13xx | |

vertical | custom made


| | | | | |
|--|---|---|---|------------------------------|
|  |  |  |  | dimensions (h*w) 161*90mm |
| DSA RA-14000-21xx | DSA RA-23000-21xx | DSA RA-24000-21xx | DSA RA-44000-21xx | |

fittings / sockets

| | | | | | |
|--|--|---|--|--|---|
|  | EBERLE analogue ROOM thermostat under plaster mounting DSA 2T-00000 |  | EBERLE analogue FLOOR thermostat under plaster mounting, with sensor DSA 3T-00000 |  | EBERLE digital thermostat universal DSA 4T-00000 |
|--|--|---|--|--|---|

i When selecting a universal digital thermostat and connecting it as a floor thermostat, it is necessary to purchase the floor sensor DSA 56 separately. More information about thermostats can be found on page 72.
WARNING: For vertical installation, use installation boxes designed for double or triple frames; do not use separate connected boxes.

fittings / sockets

| | | | |
|---|--|---|--|
|  | fitting, arrangement 1 singlepole switch, 10 AX, 250 V AC DSA 01-00001 white DSA 01-00002 black |  | sockets single, cover white safety shutters 16 A, 250 V AC DSA Z1-Z1001 white DSA Z1-Z1035 white matt DSA Z1-Z1002 black DSA Z1-Z1034 black matt |
|  | fitting, arrangement 2 twopole switch, 10 AX, 250 V AC DSA 02-00001 white DSA 02-00002 black |  | sockets schuko single, cover white safety shutters 16 A, 250 V AC DSA S1-S1001 white DSA S1-S1035 white matt DSA S1-S1002 black DSA S1-S1034 black matt |
|  | fitting, arrangement 5 serial change-over switch, 10 AX, 250 V AC DSA 05-00001 white DSA 05-00002 black |  | 2x USB-A charging sockets 2x connector:: USB - charging, 2,1 A, 10,5 W DSA 96-00001 keystone white DSA 96-00002 keystone black |
|  | fitting, arrangement 6 AC change-over switch, 10 AX, 250 V AC DSA 06-00001 white DSA 06-00002 black |  | 2x USB-C charging sockets 2x connector:: USB - charging, 2,1 A, 10,5 W DSA 9C-00001 keystone white DSA 9C-00002 keystone black |
|  | fitting, arrangement 7 crossbar switch, 10 AX, 250 V AC DSA 07-00001 white DSA 07-00002 black |  | TV + SAT sockets 1 connector:: female, Z=75 Ω DSA 97-00001 keystone white DSA 97-00002 keystone black |
|  | fitting, arrangement 1/0 switching controller, 10 AX, 250 V AC DSA 10-00001 white DSA 10-00002 black |  | 2x PC Cat. 5E sockets 2x connector:: RJ 45 cat. 5E, UTP DSA 93-00001 keystone white DSA 93-00002 keystone black |
|  | fitting, arrangement 1/0+1/0 switching controller, double, 10 AX, 250 V AC could be used as a blind controller without blocking DSA 11-00001 white DSA 11-00002 black |  | 2x PC Cat. 6 sockets 2x connector:: RJ 45 cat. 6, UTP DSA 98-00001 keystone white DSA 98-00002 keystone black |
|  | fitting, arrangement 6+6 switching controller, double, 10 AX, 250 V AC DSA 66-00001 white DSA 66-00002 black |  | passive switch for intelligent systems with 1 rocker switch control 12 V DC/ 24 V DC depending on type DSA KC-01001 white DSA KC-01002 black |
|  | press button switch 1/0 press button, up to 24V 50 mA, 24 V DC DSA 17-00001 white DSA 17-00002 black |  | passive switch for intelligent systems with 2 rocker switch controls 12 V DC/ 24 V DC depending on type DSA KC-02001 white DSA KC-02002 black |
|  | press button switch 1/0+1/0 Up to 24 V, with gold plated contacts up to 50 mA, 24 V DC DSA 18-00001 white DSA 18-00002 black |  | support frame for blind cover DSA 60-00000 |
|  | fitting for shutter controller 10 AX, 250 V AC DSA 16-00001 white DSA 16-00002 black |  | support frame for data sockets DSA 90-00000 |

i The rockers are part of switching mechanisms. Passive short press switch for intelligent systems can also be used for KNX systems. Any connector from the accessories on page 76 can be selected for the support frame.



nexa

*minimalistic
design*



Nexa, design series of switches and sockets, inspired by the RETRO toggle series, presenting a perfect blend of minimalism and functionality for any space. The frame material features high-quality glass in practical white and black finishes, as well as wooden frames for those seeking a natural design. Setting it apart from the RETRO series is the size and thickness of the frame, measuring 86 mm in diameter and 8 mm in thickness, providing modern and minimalist vibes to interiors.



nexa rondo

It is characterized by clean and simple shapes that emphasize the beauty of glass and wood. The switches are designed with an emphasis on minimalist style and ergonomic design, giving the interior a modern look.



glass white frame
/ double toggle white



wooden light oak frame
/ single toggle white



glass black frame
/ sockets cover black matt

nexa quadro

It combines the timeless beauty of wood and glass with the modern appearance of metal. Each piece is carefully crafted to blend traditional craftsmanship with premium design, creating a unique spatial element. The devices are universal for both collections of the NEXA series.



glass black frame
/ double toggle black



wooden dark stained oak frame
/ single toggle black



glass white frame
/ sockets cover white matt



sets | nexa rondo



single toggle switch
(arrangement 1, 2, 6, 7, 1/0),
press button up to 24 V



single toggle switch
(arrangement 5, 6+6, 1/0+1/0),
shutter switch,
press button up to 24 V



single sockets



schuko
single sockets



TV outlet, SAT, PC sockets
cat. 5E / cat.6



USB-A sockets
/ USB-A charging sockets



USB-C charging
sockets



single sockets british
standard in a glass frame



single sockets british
standard in a wooden frame



double sockets british standard
in a glass frame

frames

glass



01
white




02
black

wood **



23*
maple



21
light
oak




22*
dark
stained oak

toggles

metal



white



black



patina

sets | nexa quadro



single toggle switch
(arrangement 1, 2, 6, 7, 1/0),
press button up to 24 V



single toggle switch
(arrangement 5, 6+6, 1/0+1/0),
shutter switch,
press button up to 24 V



single sockets



schuko
single sockets



TV outlet, SAT, PC sockets
cat. 5E / cat.6



USB-A sockets
/ USB-A charging outlet



USB-C charging
sockets



single sockets british
standard in a glass frame



double sockets british
standard in a wooden frame



EBERLE analogue
ROOM/FLOOR thermostat
under plaster mounting
(with sensor)



EBERLE digital thermostat
universal (application as floor
and combined, it is
necessary to buy a sensor)

covers



01
white



02
black



34
black
matt



* Available by order only.
** For wooden frames we use only solid wood therefore each frame is unique and tone/pattern might slightly vary.
IMPORTANT: The british standard socket in the rondo collection must be installed in a round installation box.



When selecting a universal digital thermostat and connecting it as a floor thermostat, it is necessary to purchase the floor sensor DSN 56 separately. More information about thermostats can be found on page 72.

frame multiplicities

 nexa rondo  nexa quadro

| | | | | | | | |
|--------|---|---|---|---|---|---|---------------------------------|
| |  |  |  |  |  |  | |
| rondo | DSN RN-10000-11xx | DSN RN-20000-11xx | DSN RN-30000-11xx | DSN RN-40000-11xx | DSN RN-60000-11xx | DSN RN-A0000-11xx | dimensions (h×w) 86×86 mm |
| quadro | DSN RQ-10000-11xx | DSN RQ-20000-11xx | DSN RQ-30000-11xx | DSN RQ-40000-11xx | DSN RQ-60000-11xx | DSN RQ-A0000-11xx | |
| |  | | | | | | |
| quadro | DSN RQ-T0000-11xx | | | | | | |
| | frame for thermostat (only in the quadro range) | | frame for socket and british standard socket in a wooden frame | frame for data socket | frame for blind cover | frame for british standard socket in a glass frame | |

horizontal

| | | | | | | | |
|--------|---|---|---|---|---|---|---|
| |  |  |  |  |  |  | |
| rondo | DSN RN-11000-12xx | DSN RN-22000-12xx | DSN RN-33000-12xx | DSN RN-12000-12xx | DSN RN-13000-12xx | DSN RN-AA000-12xx | dimensions (h×w) 86×157 mm |
| quadro | DSN RQ-11000-12xx | DSN RQ-22000-12xx | DSN RQ-33000-12xx | DSN RQ-12000-12xx | DSN RQ-13000-12xx | DSN RQ-AA000-12xx | |
| |  |  |  | | | | |
| rondo | DSN RN-11100-13xx | DSN RN-33300-13xx | DSN RN-13300-13xx | | | | dimensions (h×w) 86×228 mm |
| quadro | DSN RQ-11100-13xx | DSN RQ-33300-13xx | DSN RQ-13300-13xx | | | | |
| | | | | | | | frame for double british socket in a glass frame |

vertical

| | | | | | | | |
|--------|---|---|---|---|---|--|----------------------------------|
| |  |  |  |  |  | | |
| rondo | DSN RN-11000-21xx | DSN RN-22000-21xx | DSN RN-33000-21xx | DSN RN-12000-21xx | DSN RN-13000-21xx | | dimensions (h×w) 157×86 mm |
| quadro | DSN RQ-11000-21xx | DSN RQ-22000-21xx | DSN RQ-33000-21xx | DSN RQ-12000-21xx | DSN RQ-13000-21xx | | |

Other combinations of multiple frames can be custom made.

horizontal | custom made

| | | | | | | | |
|--------|---|---|---|---|---|--|----------------------------------|
| |  |  |  |  |  | | |
| rondo | DSN RN-44000-12xx | DSN RN-14000-12xx | DSN RN-23000-12xx | DSN RN-24000-12xx | DSN RN-34000-12xx | | dimensions (h×w) 86×157 mm |
| quadro | DSN RQ-44000-12xx | DSN RQ-14000-12xx | DSN RQ-23000-12xx | DSN RQ-24000-12xx | DSN RQ-34000-12xx | | |
| |  |  |  |  |  | | |
| rondo | DSN RN-22200-13xx | DSN RN-44400-13xx | DSN RN-11200-13xx | DSN RN-12200-13xx | DSN RN-11300-13xx | | dimensions (h×w) 86×228 mm |
| quadro | DSN RQ-22200-13xx | DSN RQ-44400-13xx | DSN RQ-11200-13xx | DSN RQ-12200-13xx | DSN RQ-11300-13xx | | |
| |  |  |  |  |  | | |
| rondo | DSN RN-12300-13xx | DSN RN-22300-13xx | DSN RN-23300-13xx | DSN RN-33400-13xx | DSN RN-34400-13xx | | dimensions (h×w) 86×228 mm |
| quadro | DSN RQ-12300-13xx | DSN RQ-22300-13xx | DSN RQ-23300-13xx | DSN RQ-33400-13xx | DSN RQ-34400-13xx | | |
| |  |  |  |  |  | | |
| rondo | DSN RN-11400-13xx | DSN RN-12400-13xx | DSN RN-22400-13xx | DSN RN-14300-13xx | DSN RN-24300-13xx | | dimensions (h×w) 86×228 mm |
| quadro | DSN RQ-11400-13xx | DSN RQ-12400-13xx | DSN RQ-22400-13xx | DSN RQ-14300-13xx | DSN RQ-24300-13xx | | |

vertical | custom made

| | | | | | | | |
|--------|---|---|---|---|---|--|----------------------------------|
| |  |  |  |  |  | | |
| rondo | DSN RN-44000-21xx | DSN RN-14000-21xx | DSN RN-23000-21xx | DSN RN-24000-21xx | DSN RN-34000-21xx | | dimensions (h×w) 157×86 mm |
| quadro | DSN RQ-44000-21xx | DSN RQ-14000-21xx | DSN RQ-23000-21xx | DSN RQ-24000-21xx | DSN RQ-34000-21xx | | |



fittings / sockets

fitting, arrangement 1
single pole switch
10 AX, 250 V AC

DSN 01-00001 single toggle white
DSN 01-00002 single toggle black
DSN 01-00005 single toggle patina

fitting, arrangement 2
two pole switch
10 AX, 250 V AC

DSN 02-00001 single toggle white
DSN 02-00002 single toggle black
DSN 02-00005 single toggle patina

fitting, arrangement 5
serial change-over switch
10 AX, 250 V AC

DSN 05-00001 double toggle white
DSN 05-00002 double toggle black
DSN 05-00005 double toggle patina

fitting, arrangement 6
AC change-over switch
10 AX, 250 V AC

DSN 06-00001 single toggle white
DSN 06-00002 single toggle black
DSN 06-00005 single toggle patina

fitting, arrangement 7
AC change-over switch
10 AX, 250 V AC

DSN 07-00001 single toggle white
DSN 07-00002 single toggle black
DSN 07-00005 single toggle patina

fitting, arrangement 1/0
switching controller
10 AX, 250 V AC

DSN 10-00001 single toggle white
DSN 10-00002 single toggle black
DSN 10-00005 single toggle patina

fitting, arrangement 1/0 + 1/0
switching controller, double
10 AX, 250 V AC
could be used as a blind controller
without blocking

DSN 11-00001 double toggle white
DSN 11-00002 double toggle black
DSN 11-00005 double toggle patina

fitting, arrangement 6+6
switching controller, double
10 AX, 250 V AC

DSN 66-00001 double toggle white
DSN 66-00002 double toggle black
DSN 66-00005 double toggle patina

press button switch 1/0
Up to 24 V, with gold plated contacts
up to 50 mA, 24 V DC

DSN 17-00001 single toggle white
DSN 17-00002 single toggle black
DSN 17-00005 single toggle patina

press button switch 1/0 + 1/0
up to 24V, with gold plated contacts
up to 50 mA, 24 V DC

DSN 18-00001 double toggle white
DSN 18-00002 double toggle black
DSN 18-00005 double toggle patina

fitting for shutter controller
10 AX, 250 V AC

DSN 16-00001 double toggle white
DSN 16-00002 double toggle black
DSN 16-00005 double toggle patina

2P+PE sockets
single, cover white safety shutters
16 A, 250 V AC

DSN Z1-Z1001 outlet cover white
DSN Z1-Z1002 outlet cover black
DSN Z1-Z1034 outlet cover black matt

2P+PE schuko sockets
single, cover white safety shutters
16 A, 250 V AC

DSN S1-S1001 outlet cover white
DSN S1-S1002 outlet cover black
DSN S1-S1034 outlet cover black matt

USB-A charging sockets
2.1 A, 10,5 W

DSN 96-00001 keystone white
DSN 96-00002 keystone black

USB-C charging sockets
2.1 A, 10,5 W

DSN 9C-00001 keystone white
DSN 9C-00002 keystone black

TV sockets
1 connector: IEC female

DSN 97-00001 keystone white
DSN 97-00002 keystone black

SAT sockets
1 connector: female

DSN 99-00001 keystone white
DSN 99-00002 keystone black

fittings / sockets

PC Cat. 5E sockets
1 connector: RJ 45 cat. 5E, UTP

DSN 93-00001 keystone white
DSN 93-00002 keystone black

PC Cat. 6 sockets
1 connector: RJ 45 cat. 6, UTP

DSN 98-00001 keystone white
DSN 98-00002 keystone black

socket, british standard 2P + T(E)
single, for a glass frame
13 A, 250 V AC

DSN A1-A0000

socket, british standard 2P + T(E)
single, with a cover for a wooden frame
13 A, 250 V AC

DSN A1-A1001 white cover
DSN A1-A1034 black cover

support frame for blind cover

DSN 60-00000

passive switch for intelligent systems
with 1 toggle
12 V DC / 24 V DC

DSN KC-P1001 single toggle white
DSN KC-P1002 single toggle black
DSN KC-P1005 single toggle patina

passive switch for intelligent systems
with 2 toggles
12 V DC / 24 V DC

DSN KC-P2001 double toggle white
DSN KC-P2002 double toggle black
DSN KC-P2005 double toggle patina

EBERLE analogue ROOM thermostat
under plaster mounting

DSN 2T-00000

EBERLE analogue FLOOR thermostat
under plaster mounting, with sensor

DSN 3T-00000

EBERLE digital thermostat
universal

DSN 4T-00000

i Thermostats are available only in the NEXA QUADRO collection. When selecting a universal digital thermostat and connecting it as a floor thermostat, it is necessary to purchase the floor sensor DSN 56 separately. More information about thermostats can be found on page 72.



i Toggles are part of switching mechanisms and cannot be ordered separately. The devices are universal for both collections of the NEXA series.



retro

*tradition in
a modern design*



The RETRO range of switches and sockets introduces an original design inspired by rotary ceramic switches from the 1930's and world unique functionalist architecture of Zlin city, where OBZOR comes from. Therefore the RETRO range finds its place not only in rustic, vintage interiors, but also in modern loft, minimalist and industrial interiors.



A few clever interior elements, such as switches and sockets, will enhance the charm of your interior. Our RETRO switch is not just an unobtrusive device that fulfils its essential purpose but is equivalent design companion to the rest of your household equipment.

Let us introduce you to switches that are anything but discreet. No lines, edges or restraint in dimensions. RETRO switches are round, relatively massive and controlled by a rotary handle.

RETRO switches stand out in modern lofts and other minimalist interiors. They will fit well on revealed brick walls, concrete walls as well as on ceramic tiles. RETRO will also add charm to rustic interior, e.g. in rural chalets.

The RETRO line offers a complete range of fittings to meet today's requirements for comfortable living:

- various switching fittings
- shutter controller
- classic sockets (schuko version available)
- computer sockets
- TV sockets
- SAT sockets
- HDMI sockets
- USB charging sockets
- thermostats and motion sensors

There are four collections of noble natural materials to choose from:

- glass
- ceramics
- solid wood

glass collection

Design that is not ostentatious or complicated, but simply great, bringing out the beauty of real glass. Timeless switches from this collection will highlight modern furnished interiors as well as masterpieces of modern architecture.



glass white frame
/ OBZ handle patina



glass black frame
/ BTA handle white



glass white frame
/ sockets cover black matt



DO YOU WANT TO
KNOW MORE?
www.retrovypinac.cz/en





ceramic collection

Ceramic collection combines white and black ceramic frames and covers. In case of switches you can choose from three different types of control handles that will bring up fresh and exciting combinations!



ceramic white frame / cover white
/ OBZ handle patina



ceramic black frame / cover white
/ single toggle black



ceramic black frame / cover black
/ BTA handle white

hand painted collection

The hand painted white ceramic collection offers single frames in four folklore patterns. These can be combined with any of our covers and handles / toggles.




pattern 1 / cover white
/ double toggle white



pattern 2 / cover white
/ ZLN handle patina



pattern 3 / cover white
/ OBZ handle patina

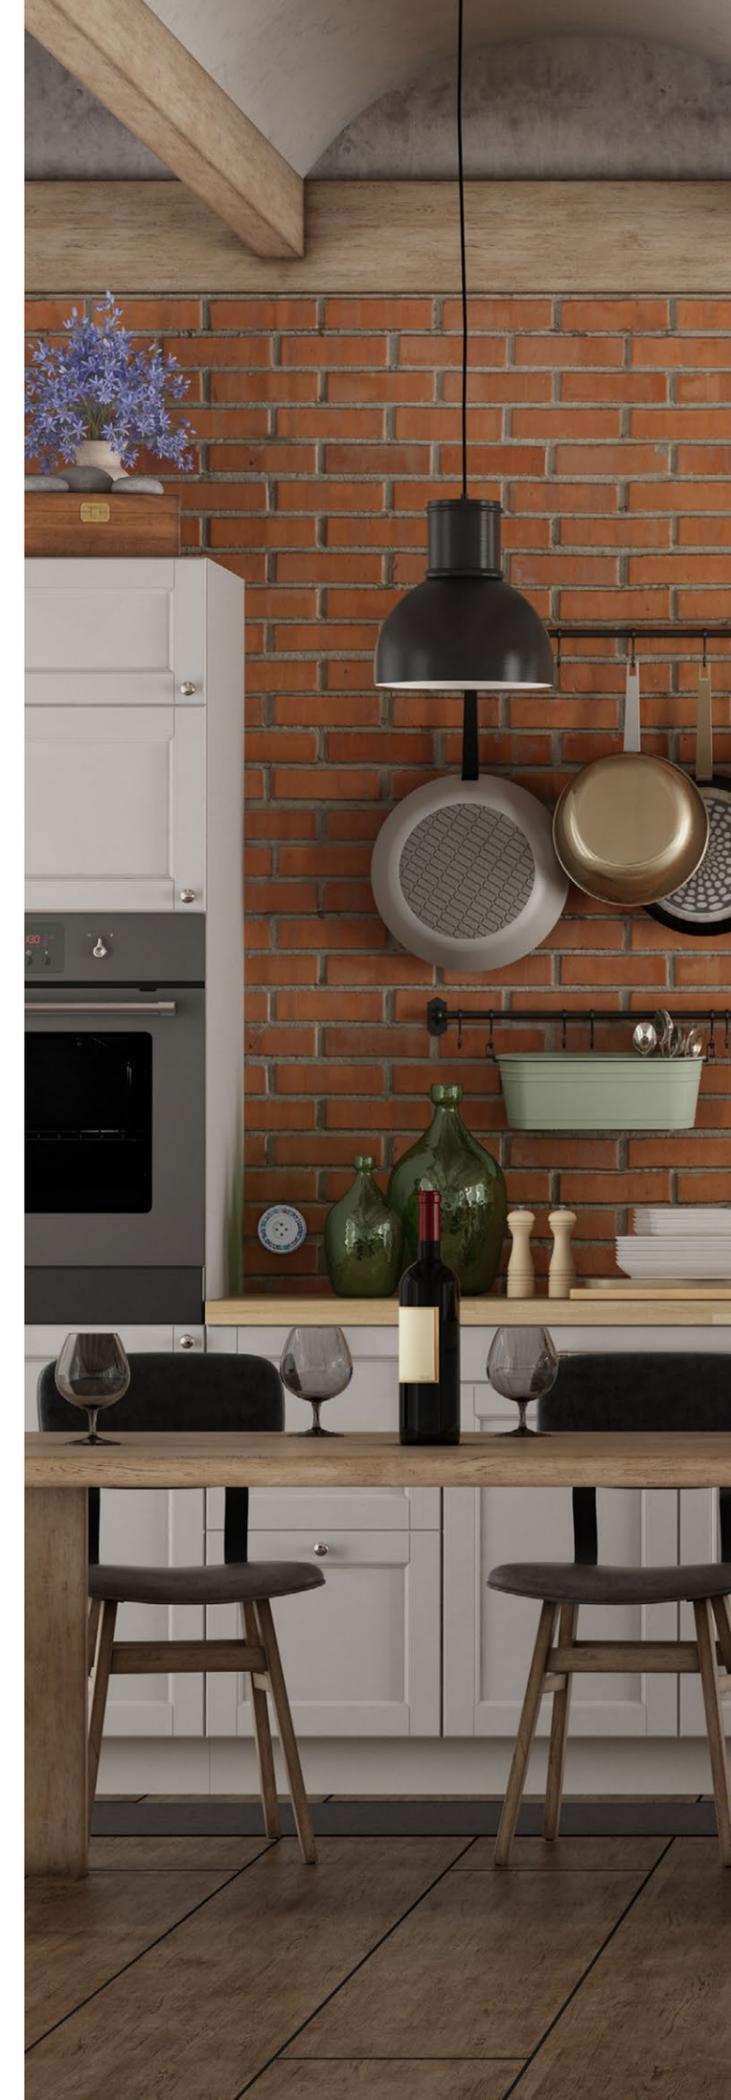

wood collection

In this collection we present solid wood frames where you can choose between light oak, dark stained oak and maple in combination with white or cover black.



wooden maple frame / cover white / BTA handle patina



wooden light oak frame / cover black / single toggle white



wooden dark stained oak frame / cover white / double toggle black

frames

glass



wood **



ceramic ***



* Until stocks are sold out
 ** For wooden frames we use only solid wood therefore each frame is unique and tone/pattern might slightly vary.
 *** The painted RETRO frames are available by order only.



ORDER CODE:
 DSR 00-00000-11XX

frame multiplicities

| | | |
|---|-------------------|--|
|  | DSR 00-00000-11XX | dimensions (h*w) 97*97 mm all collections |
|  | DSR 00-00000-12XX | dimensions (h*w) 97*168 mm ceramic (not painted), wood, glass |
|  | DSR 00-00000-13XX | dimensions (h*w) 97*239 mm ceramic (not painted), wood |
|  | DSR 00-00000-14XX | dimensions (h*w) 97*310 mm wood |



Fittings and sockets can be combined within up to fourfold frame wall mounted in horizontal or vertical position. Same frame can be used for both options.

sets



switch arrangement
1, 2, 5, 6, 7, 1/0,
shutter switch



switch (glass) arrangement
1, 2, 5, 6, 7, 1/0,
shutter switch



single toggle switch
arrangement 1, 2, 6, 7, 1/0,
press button up to 24 V



double toggle switch
arrangement 5, 6+6, 1/0 + 1/0
shutter switch,
press button up to 24 V



LED dimmer



USB-A sockets
/ USB-A charging outlet



HDMI sockets



USB-C charging sockets



PC sockets
Cat. 5E / Cat. 6



TV sockets



SAT sockets



single sockets



schuko
single sockets



thermostat
(available only in wooden
and glass frames)



motion sensor
(available only in wooden
and glass frames)



single sockets british
standard in a glass and
wooden frame

covers



switch cover white
+ white BTA handle
DSR 00-01201-0000



switch cover black
+ white BTA handle
DSR 00-02201-0000



HDMI, USB, TV, SAT
sockets cover, white
DSR 00-91000-0000



switch cover white
+ black BTA handle
DSR 00-01202-0000



switch cover black
+ black BTA handle
DSR 00-02202-0000



HDMI, USB, TV, SAT
sockets cover, black
DSR 00-92000-0000



switch cover white
+ patina BTA handle
DSR 00-01203-0000



switch cover black
+ patina BTA handle
DSR 00-02203-0000



PC sockets cover,
white
DSR 00-93000-0000



switch cover white
+ patina OBZ handle
DSR 00-01103-0000



switch cover black
+ patina OBZ handle
DSR 00-02103-0000



PC sockets cover,
black
DSR 00-94000-0000



switch cover white
+ patina ZLN handle
DSR 00-01303-0000



switch cover black
+ patina ZLN handle
DSR 00-02303-0000



sockets cover,
white
DSR 00-Z1000-0000



cover for a LED dimmer
rotary button
DSR 00-03401-0000



cover for a LED dimmer
rotary button
DSR 00-03434-0000



sockets cover,
black matt
DSR 00-Z2000-0000



cover for a LED dimmer
rotary button
DSR 00-04401-0000



cover for a LED dimmer rotary
button black/black mat
DSR 00-04434-0000



schuko sockets cover,
white
DSR 00-S3000-0000



blind cover
white
DSR 60-61000-0000



blind cover
black
DSR 60-62000-0000



schuko sockets cover,
black matt
DSR 00-S4000-0000



For RETRO series switches, a long-proven cam switch mechanism is used.




Toggle switches use a rocker mechanism.



Switch covers and communication sockets cannot be used for RETRO glass collection. You can find covers for RETRO glass on page 37.

fittings / sockets


| | | |
|---|---|--|
|  fitting, arrangement 1 singlepole switch 16 AX, 250 V AC DSR 01-00000-0000 |  HDMI sockets 1 connector: HDMI female DSR 92-00000-0000 |  2P+PE sockets single, cover white safety shutters 16 A, 250 V AC DSR Z1-Z1000-0000 |
|  fitting, arrangement 2 twopole switch 16 AX, 250 V AC DSR 02-00000-0000 |  USB-A sockets 1 connector: USB 3.0 female DSR 94-00000-0000 |  2P+PE sockets single, black matt cover safety shutters 16 A, 250 V AC DSR Z1-Z2000-0000 |
|  fitting, arrangement 5 serial change-over switch 16 AX, 250 V AC DSR 05-00000-0000 |  USB-A charging sockets 1 connector: USB 3.0 female + charger (2100 mA) DSR 95-00000-0000 |  2P+PE schuko sockets single, cover white safety shutters 16 A, 250 V AC DSR S2-S3000-0000 |
|  fitting, arrangement 6 AC change-over switch 16 AX, 250 V AC DSR 06-00000-0000 |  TV sockets 1 connector: IEC female DSR 97-00000-0000 |  2P+PE schuko sockets single, black matt cover safety shutters 16 A, 250 V AC DSR S2-S4000-0000 |
|  fitting, arrangement 7 crossbar switch 16 AX, 250 V AC DSR 07-00000-0000 |  SAT sockets 1 connector: female DSR 99-00000-0000 |  blind cover DSR 00-61000-0000 |
|  fitting, arrangement 1/0 switching controller 16 AX, 250 V AC DSR 10-00000-0000 |  PC Cat. 5E sockets 1 connector: RJ45 Cat. 5E UTP DSR 93-00000-0000 |  blind cover DSR 00-62000-0000 |
|  fitting for shutter controller rotary 16 AX, 230 V AC DSR 22-00000-0000 |  PC Cat. 6 sockets 1 connector: RJ45 Cat. 6 UTP DSR 98-00000-0000 |  LED dimmer with arrangement 6 230 V AC, load 0-100 W LED, 10-250 W incandescent light bulb DSR 23-00000-0000 |
|  3 gang 1 way switch 16 AX, 230V AC DSR 03-00000-0000 |  USB-C charging sockets 1 connector: USB-C charger 2,1 A, 10,5 W DSR 9C-00000-0000 |  socket, british standard 2P + T(E) single 13 A, 250 V AC DSR A1-A1000 white DSR A1-A2000 black |

i **IMPORTANT:** Recommended min. depth of installation box for RETRO series is 60 mm. For more information, see the chapter Technical drawings or contact our sales department. Connectors for keystone sockets can also be supplied in black color.

fittings with covers & toggles

| | |
|--|--|
|  fitting, arrangement 1 single pole switch 10 AX, 250 V AC DPR 01-01001-0000 cover white / single toggle white DPR 01-01002-0000 cover white / single toggle black DPR 01-01003-0000 cover white / single toggle patina DPR 01-02001-0000 cover black / single toggle white DPR 01-02002-0000 cover black / single toggle black DPR 01-02003-0000 cover black / single toggle patina |  press button 1/0, up to 24 V 50mA, 24 V DC DPR 17-01001-0000 cover white / single toggle white DPR 17-01002-0000 cover white / single toggle black DPR 17-01003-0000 cover white / single toggle patina DPR 17-02001-0000 cover black / single toggle white DPR 17-02002-0000 cover black / single toggle black DPR 17-02003-0000 cover black / single toggle patina |
|  fitting, arrangement 2 two pole switch 10 AX, 250 V AC DPR 02-01001-0000 cover white / single toggle white DPR 02-01002-0000 cover white / single toggle black DPR 02-01003-0000 cover white / single toggle patina DPR 02-02001-0000 cover black / single toggle white DPR 02-02002-0000 cover black / single toggle black DPR 02-02003-0000 cover black / single toggle patina |  fitting, arrangement 1/0 + 1/0 switching controller, double 10AX, 250 V AC DPR 11-03001-0000 cover white / double toggle white DPR 11-03002-0000 cover white / double toggle black DPR 11-03003-0000 cover white / double toggle patina DPR 11-04001-0000 cover black / double toggle white DPR 11-04002-0000 cover black / double toggle black DPR 11-04003-0000 cover black / double toggle patina |
|  fitting, arrangement 5 serial change-over switch 10 AX, 250 V AC DPR 05-03001-0000 cover white / double toggle white DPR 05-03002-0000 cover white / double toggle black DPR 05-03003-0000 cover white / double toggle patina DPR 05-04001-0000 cover black / double toggle white DPR 05-04002-0000 cover black / double toggle black DPR 05-04003-0000 cover black / double toggle patina |  fitting for shutter controller 10 AX, 250 V AC DPR 16-03001-0000 cover white / double toggle white DPR 16-03002-0000 cover white / double toggle black DPR 16-03003-0000 cover white / double toggle patina DPR 16-04001-0000 cover black / double toggle white DPR 16-04002-0000 cover black / double toggle black DPR 16-04003-0000 cover black / double toggle patina |
|  fitting, arrangement 6 AC change-over switch 10 AX, 250 V AC DPR 06-01001-0000 cover white / single toggle white DPR 06-01002-0000 cover white / single toggle black DPR 06-01003-0000 cover white / single toggle patina DPR 06-02001-0000 cover black / single toggle white DPR 06-02002-0000 cover black / single toggle black DPR 06-02003-0000 cover black / single toggle patina |  double press button 1/0+1/0, up to 24 V 50mA, 24 V DC DPR 18-03001-0000 cover white / double toggle white DPR 18-03002-0000 cover white / double toggle black DPR 18-03003-0000 cover white / double toggle patina DPR 18-04001-0000 cover black / double toggle white DPR 18-04002-0000 cover black / double toggle black DPR 18-04003-0000 cover black / double toggle patina |
|  fitting, arrangement 7 crossbar switch 10 AX, 250 V AC DPR 07-01001-0000 cover white / single toggle white DPR 07-01002-0000 cover white / single toggle black DPR 07-01003-0000 cover white / single toggle patina DPR 07-02001-0000 cover black / single toggle white DPR 07-02002-0000 cover black / single toggle black DPR 07-02003-0000 cover black / single toggle patina |  fitting, arrangement 6+6 double AC change-over switch 10 AX, 250 V AC DPR 66-03001-0000 cover white / double toggle white DPR 66-03002-0000 cover white / double toggle black DPR 66-03003-0000 cover white / double toggle patina DPR 66-04001-0000 cover black / double toggle white DPR 66-04002-0000 cover black / double toggle black DPR 66-04003-0000 cover black / double toggle patina |
|  fitting, arrangement 1/0 switching controller 10 AX, 250 V AC DPR 10-01001-0000 cover white / single toggle white DPR 10-01002-0000 cover white / single toggle black DPR 10-01003-0000 cover white / single toggle patina DPR 10-02001-0000 cover black / single toggle white DPR 10-02002-0000 cover black / single toggle black DPR 10-02003-0000 cover black / single toggle patina | |

toggle colors / metal



i RETRO toggle switches are suitable for installation into standard installation boxes. For more information, see the chapter Technical drawings or contact our sales department. Toggle is always an integral part of the fitting and the cover is supplied with the device. Not for sale separately.

thermostats and motion sensors



EBERLE analogue ROOM thermostat under plaster mounting

- DSR 2T-00000-1130 white glass
- DSR 2T-00000-1131 black glass
- DSR 2T-00000-1121 light oak
- DSR 2T-00000-1122 dark stained oak
- DSR 2T-00000-1123 maple



EBERLE analogue FLOOR thermostat under plaster mounting, with sensor

- DSR 3T-00000-1130 white glass
- DSR 3T-00000-1131 black glass
- DSR 3T-00000-1121 light oak
- DSR 3T-00000-1122 dark stained oak
- DSR 3T-00000-1123 maple



digital thermostat EBERLE universal

- DSR 4T-00000-1130 white glass
- DSR 4T-00000-1131 black glass
- DSR 4T-00000-1121 light oak
- DSR 4T-00000-1122 dark stained oak
- DSR 4T-00000-1123 maple



move sensor B.E.G

- DSR BX-00000-1130 white glass
- DSR BX-00000-1131 black glass
- DSR BX-00000-1121 light oak
- DSR BX-00000-1122 dark stained oak
- DSR BX-00000-1123 maple

i For floor connection with our digital thermostat you need to add extra DSR 56 floor sensor.

i For more thermostat info go to page 72. Thermostats are available assembled with frames only.

i For more motion sensor info go to page 73, X = chosen motion sensor type. Available assembled with frame only.



glass collection



BTA handle white + frame

- DSR XX-00201-1130 white
- DSR XX-00201-1131 black *



BTA handle black + frame

- DSR XX-00202-1130 white
- DSR XX-00202-1131 black *



OBZ handle patina + frame

- DSR XX-00103-1130 white



single sockets

- DSR Z1-Z1000-Z130 white, white cover
- DSR Z1-Z1000-Z131 black *, white cover
- DSR Z1-Z2000-Z130 white, black cover
- DSR Z1-Z2000-Z131 black *, black cover



schuko single sockets

- DSR S2-S3000-Z130 white, white cover
- DSR S2-S3000-Z131 black *, white cover
- DSR S2-S4000-Z130 white, black cover
- DSR S2-S4000-Z131 black *, black cover



HDMI sockets

- DSR 92-00000-U130 white
- DSR 92-00000-U131 black *



PC sockets

- DSR 93-00000-P130 Cat. 5E / white
- DSR 93-00000-P131 Cat.. 5E / black *
- DSR 98-00000-P130 Cat. 6 / white *
- DSR 98-00000-P131 Cat. / black *



USB-A sockets

- DSR 94-00000-U130 white
- DSR 94-00000-U131 black *



USB-A charging sockets

- DSR 95-00000-U130 white
- DSR 95-00000-U131 black *



USB-C charging sockets

- DSR 9C-00000-U130 white
- DSR 9C-00000-U131 black *



TV sockets

- DSR 97-00000-U130 white
- DSR 97-00000-U131 black *



SAT sockets

- DSR 99-00000-U130 white
- DSR 99-00000-U131 black *



EBERLE analogue ROOM thermostat under plaster mounting

- DSR 2T-00000-1130 white
- DSR 2T-00000-1131 black *



EBERLE analogue FLOOR thermostat under plaster mounting, with sensor

- DSR 3T-00000-1130 white
- DSR 3T-00000-1131 black *



digital thermostat EBERLE universal

- DSR 4T-00000-1130 white
- DSR 4T-00000-1131 black *



move sensor B.E.G

- DSR BX-00000-1130 white
- DSR BX-00000-1131 black *

i Glass collection offers white and black frame colours together with BTA white/black and OBZ patina handles.




i DSR Z1 / DSR S2 sockets include safety shutters. Connectors for keystone sockets can also be supplied in black color.
* Until stocks are sold out



decente

pure lines

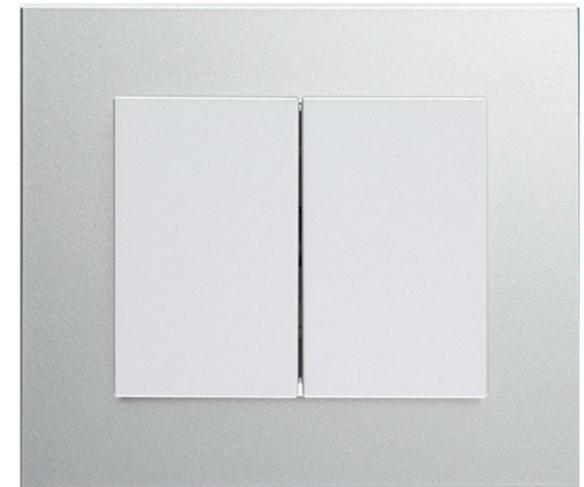

Clean lines and timeless design, together with noble natural materials, characterize the DECENTE series. Wider, luxurious looking glass, wooden, metal or plexi-glass frames beautifully complement a variety of modern interior styles. Frames of minimal thickness provide an elegant feel. Covers are made of high quality, UV-stable plastic.



timeless design

Various materials in different shades of glass, wood, metal, and plexiglass allow perfect coordination with the interior according to your preferences.



wooden walnut MDF frame
/ cover white



wooden mahogany MDF frame
/ cover titanium




wooden oak MDF frame
/ cover white




glass milk white frame
/ cover white



stainless steel frame
/ cover black matt

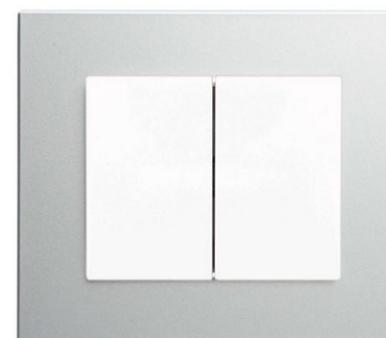


aluminium frame
/ cover white

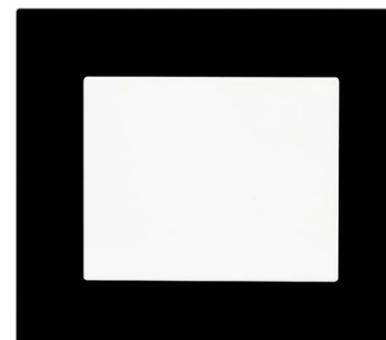

plexiglass black frame
/ cover white



Try our online designer tool
www.domovnivypinace.cz/en

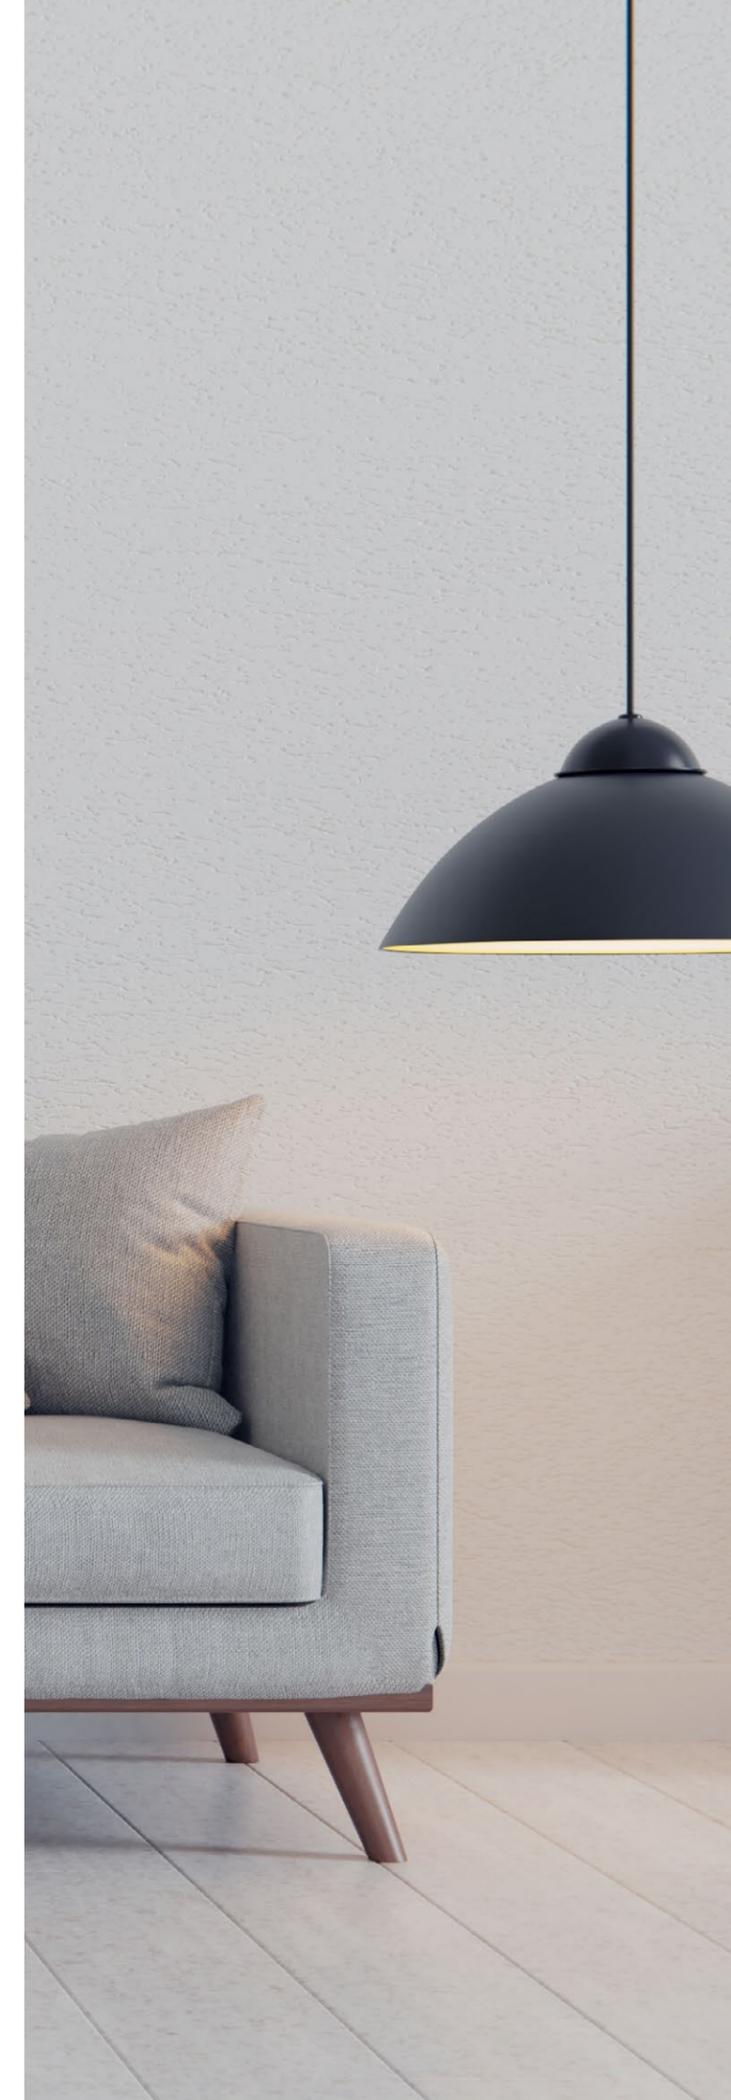

frame multiplicities decente

| | | |
|--|---------------------------|--------------------------------|
|  | DSD 00-00000- 11XX | dimensions (h×w) 95×110 mm |
|  | DSD 00-00000- 12XX | dimensions (h×w) 95×181 mm |
|  | DSD 00-00000- 13XX | dimensions (h×w) 95×252 mm |
|  | DSD 00-00000- 14XX | dimensions (h×w) 95×323 mm |
|  | DSD 00-00000- 21XX | dimensions (h×w) 166×110 mm |
|  | DSD 00-00000- 31XX | dimensions (h×w) 237×110 mm |
|  | DSD 00-00000- 41XX | dimensions (h×w) 308×110 mm |
|  | DSD 00-00000- 82XX | dimensions (h×w) 130×110 mm |


i Please note that horizontal and vertical multiple frames have different design.

decente mini


| | | |
|---|---------------------------|--------------------------------|
|  | DSI 00-00000- 118X | dimensions (h×w) 90×102 mm |
|  | DSI 00-00000- 128X | dimensions (h×w) 90×174 mm |
|  | DSI 00-00000- 138X | dimensions (h×w) 90×245 mm |
|  | DSI 00-00000- 148X | dimensions (h×w) 90×316 mm |
|  | DSI 00-00000- 218X | dimensions (h×w) 162×102 mm |
|  | DSI 00-00000- 318X | dimensions (h×w) 233×102 mm |
|  | DSI 00-00000- 418X | dimensions (h×w) 304×102 mm |
|  | DSI 00-00000- 828X | dimensions (h×w) 125×102 mm |

i Decente mini is offered only in plexi and plexiglass.

sets

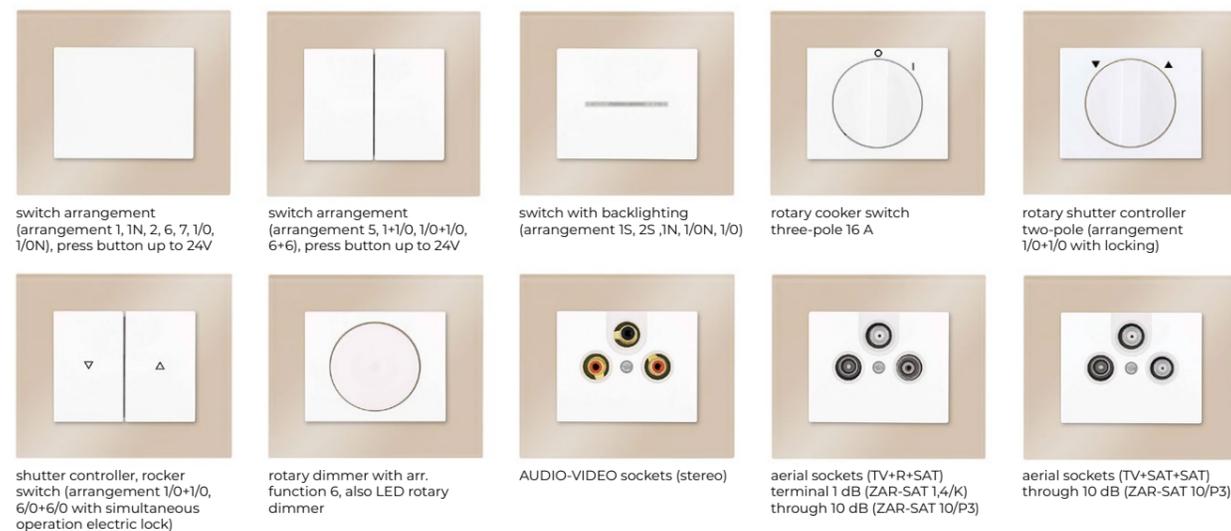


sets

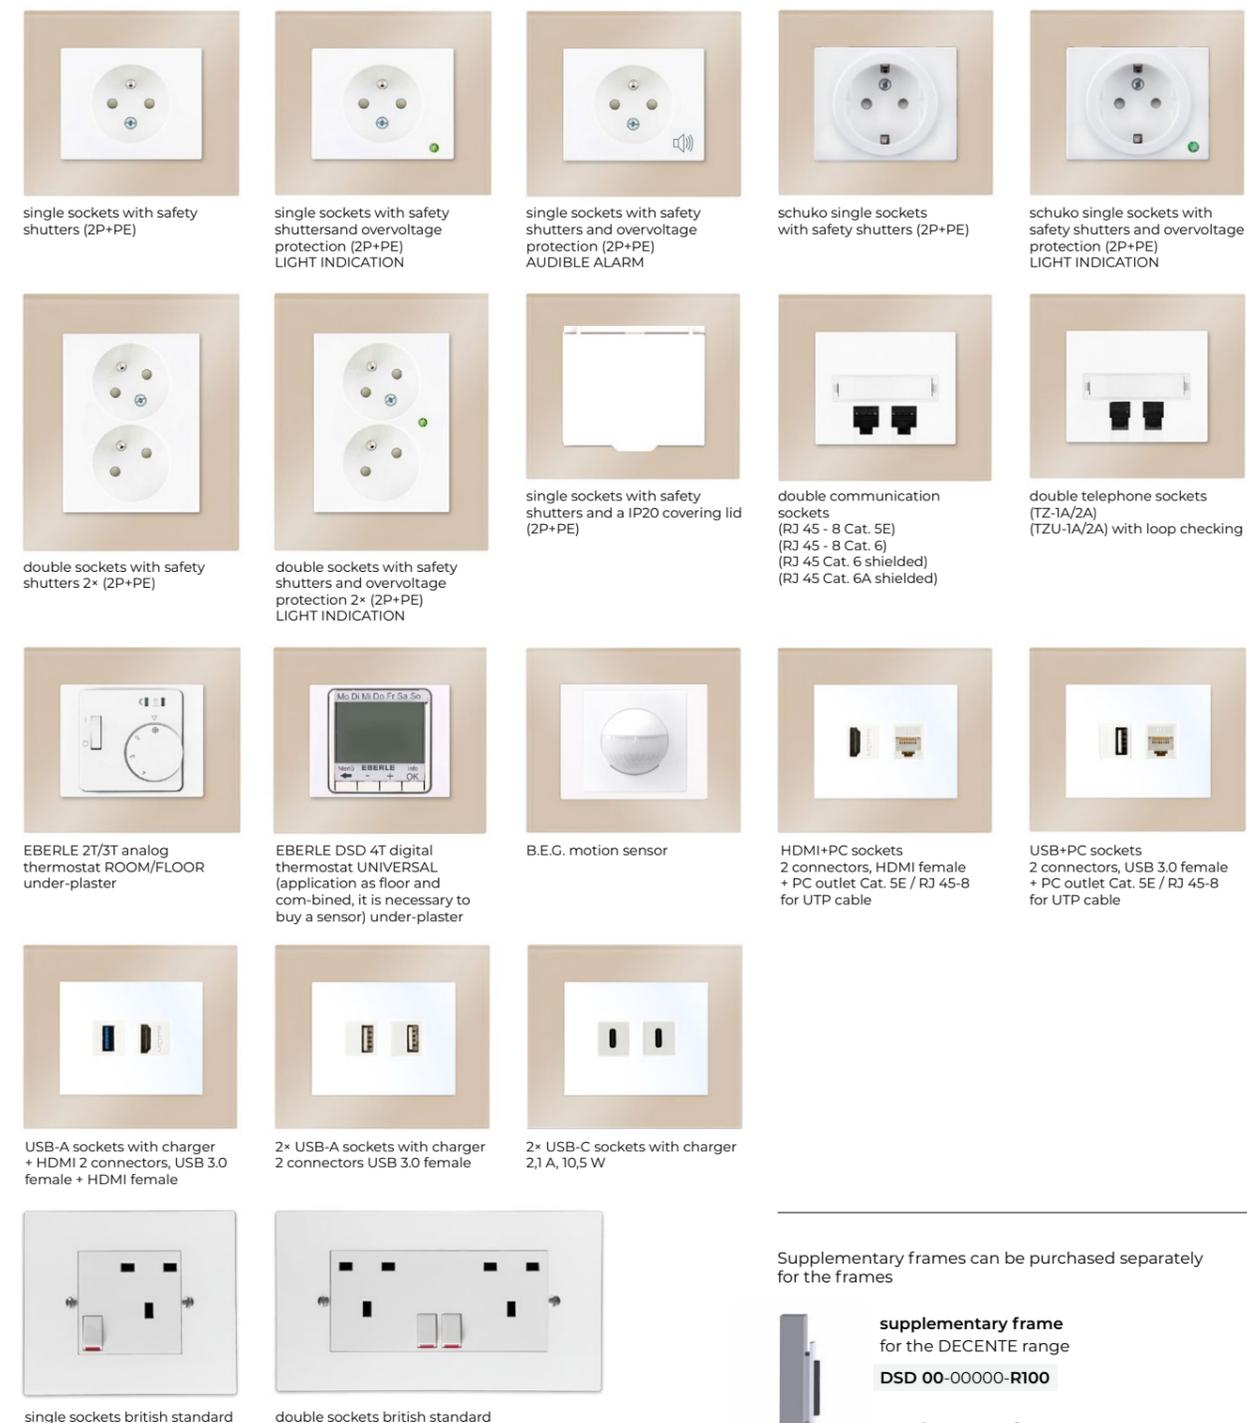

i Connectors for keystone sockets can also be supplied in black colour.

Supplementary frames can be purchased separately for the frames

-  **supplementary frame for the DECENTE range**
DSD 00-00000-**R100**
-  **supplementary frame for the DECENTE Mini range**
DSI 00-00000-**R100**

i Supplementary frames are installed between the switch frame and the wall and are intended for DECENTE and DECENTE Mini frames.

frames

glass

| | | | |
|--------------------------------------|--------------------------------------|---------------------------------|-------------------------------------|
| 57 snow white (RAL 9003) | 50 milk white (RAL 9010) | 52 dove grey (RAL 7035) | 59 cream white (RAL 1013) |
| 5A mocca (REF 1236) | 5F white matt (REF 9003) | 5G bronze matt | 5E metal grey matt (RAL 9006) |
| 58 anthracite black (RAL 9005) | 5K black matt (REF 9005) | 5H* mirror bronze | 5J mirror steel |
| 5C* indigo (REF 0627) | 53* ice green (RAL 6019) | 55* palm green (RAL 1060) | 51* brick orange (RAL 2001) |
| 54* cherry red (RAL 3001) | 56* chocolate brown (RAL 8017) | | |

wood **

| | | |
|------------------|---------------------|------------------------|
| 60 MDF oak ** | 61 MDF walnut ** | 62* MDF mahogany ** |
|------------------|---------------------|------------------------|

metal

| | |
|-----------------|-----------------------|
| 70 aluminium | 71 stainless steel |
|-----------------|-----------------------|

plexi

| | |
|---------------------------|---------------------------|
| 80 white (RAL 9003) | 81 black (RAL 9005) |
|---------------------------|---------------------------|

plexiglass

| | | |
|---------------------------|---------------------------|--------------------------|
| 82 white (RAL 9003) | 83 black (RAL 9005) | 84 grey (RAL 9006) |
|---------------------------|---------------------------|--------------------------|

covers

| | | |
|--|---|--|
| single cover for switches: 1, 2, 6, 7, 1/0, 1/0N DSD 00-010YY-0000 | cover for a shutter controller with rotary controller DSD 00-216YY-0000 | cover for a cooker switch with rotary controller DSD 00-215YY-0000 |
| single cover with backlighting DSD 00-030YY-0000 | double cover for shutter controller DSD 00-026YY-0000 | cover for a dimmer DSD 00-270XX-0000 |
| double cover for switches: 5, 6+6, 1/0+1/0, 1/0+1 DSD 00-020YY-0000 | single sockets cover with safety shutters and IP20 covering lid, 2P+PE DSD 00-870YY-0000 | cover for a LED dimmer DSD 00-230XX-0000 |
| cover for a single sockets with safety shutters 2P+PE DSD 00-810YY-0000 | schuko sockets cover, single with safety shutters and IP20 covering lid, 2P+PE DSD 00-880YY-0000 | blind cover DSD 00-050YY-0000 |
| cover for a single sockets with safety shutters and overvoltage protection 2P+PE DSD 00-840YY-0000 | sockets cover for TV+R+SAT TV+SAT+SAT AUDIO-VIDEO DSD 00-970YY-0000 | cover for telephone sockets, double DSD 00-910YY-0000 |
| schuko sockets cover, single with safety shutters 2P+PE DSD 00-830YY-0000 | cover for a double sockets with safety shutters 2x (2P+PE) DSD 00-820YY-0000 | cover for a double communication sockets DSD 00-930YY-0000 |
| schuko sockets cover, single with safety shutters and overvoltage protection 2P+PE DSD 00-860YY-0000 | cover for a double sockets with safety shutters and overvoltage protection 2x (2P+PE) DSD 00-850YY-0000 | sockets cover HDMI, PC, USB, USB-C DSD 00-920YY-0000 |
| single cover for passive switch for home automation DSD 00-K100X-0000 | double cover for passive switch for home automation DSD 00-K200X-0000 | |

cover colours

| | | | |
|----------------------------------|------------------|-----------------|----------------|
| 01 snow white glossy | 35 white matt | 30 aluminium | 32 gold |
| 02 anthracite black glossy | 34 black matt | 31 graphite | 33 titanium |



* Until stocks are sold out
** Please note that due to uniqueness of natural wooden materials used for DECENTE frames, these may not always be the same, their colour tone and pattern may vary. Colour tones may differ slightly from reality.





ORDER CODE:
DSD 00-00000-XXXX




ORDER CODE:
DSD 00-000YY-0000

fittings

-  **fitting, arrangement 1**
singlepole switch
10 AX, 250 V AC
DSD 01-00000-0000
-  **fitting, arrangement 1N**
singlepole switch with a zero terminal
10 AX, 250 V AC
DSD 12-00000-0000
-  **fitting, arrangement 2**
twopole switch
10 AX, 250 V AC
DSD 02-00000-0000
-  **fitting, arrangement 5**
serial change-over switch
10 AX, 250 V AC
DSD 05-00000-0000
-  **fitting, arrangement 6**
ac change-over switch
10 AX, 250 V AC
DSD 06-00000-0000
-  **fitting, arrangement 6+6 (6+1)**
ac change-over switch,
double 10 AX, 250 V AC
DSD 66-00000-0000
-  **fitting, arrangement 7**
crossbar switch
10 AX, 250 V AC
DSD 07-00000-0000
-  **fitting, arrangement 1/0**
switching controller
10 AX, 250 V AC
DSD 10-00000-0000
-  **fitting, arrangement 1/0+1/0**
switching controller, double
10 AX, 250 V AC
also suitable as shutter switch without locking
DSD 11-00000-0000
-  **fitting, arrangement 1/0N**
switching controller with a zero terminal
10 AX, 250 V AC
DSD 13-00000-0000
-  **fitting, arrangement 1/0+1**
switching controller
+ singlepole switch
10 AX, 250 V AC
DSD 14-00000-0000
-  **fitting, arrangement 6/0+6/0**
shutter switch with locking
10 AX, 250 V AC
DSD 16-00000-0000

- fitting, arrangement 1+1**
singlepole switch
+ singlepole switch
10 AX, 250 V AC
DSD 15-00000-0000

-  **fitting, arrangement 1/0,
press button, up to 24 V**
50 mA, 24 V DC
DSD 17-00000-0000
-  **fitting, arrangement 1/0 + 1/0,
press button, up to 24 V**
50 mA, 24 V DC
DSD 18-00000-0000
-  **passive switch**
for intelligent systems
50 mA, 12 V DC
DSD KC-00000-0000
-  **passive switch**
for intelligent systems
with KNX module
21-30 V DC
DSD KX-00000-0000
-  **AUDIO-VIDEO sockets**
stereo (2+1)
DSD 72-00000-0000
-  **fitting for cooker switch, rotary**
threepole
16 A, 400 V AC
recommended min. depth of installation box - 60 mm
DSD 21-00000-0000
-  **fitting for shutter controller**
rotary (with locking)
10 A, 230 V AC
recommended min. depth of installation box - 60 mm
DSD 22-00000-0000
-  **dimmer fitting with
arrangement 6**
230 V AC, load
40-250 W
DSD 27-00000-0000
-  **LED dimmer fitting**
230 V AC, load 0-100 W LED,
10-250 W incandescent
light bulb
DSD 23-00000-0000
-  **telephone sockets**
double
TZ-1A2A, TZU
DSD 91-00000-0000
-  **communication sockets**
Cat. 5E / Cat. 6, double
PC outlet, black connectors
2x RJ 45-8 for UTP cable
DSD 93-00000-0000 Cat. 5
DSD 98-00000-0000 Cat. 6
-  **communication sockets**
Cat. 6 / Cat. 6A, double
PC outlet, black connectors
2x RJ 45 shielded for STP cable
DSD 74-00000-0000 Cat. 6
DSD 75-00000-0000 Cat. 6A
-  **HDMI+PC socket**
2 connectors: HDMI female
+ PC outlet Cat. 5E for utp cable
DSD 92-00000-0000
-  **USB-A+PC socket**
2 connectors: USB 3.0 female
+ PC outlet Cat. 5E for utp cable
DSD 94-00000-0000

-  **USB-A sockets with charger + HDMI**
2 connectors: USB 3.0 female
+ HDMI female, white connectors
(1000 mA)
DSD 95-00000-0000
-  **2x USB-A sockets with charger**
2 connectors: USB 3.0 female
2 connectors, 5 V DC / 1000 mA
DSD 96-00000-0000
-  **2x USB-C sockets with charger**
2 connectors: USB-C charger
2,1 A, 10,5 W
DSD 9C-00000-0000
-  **support frame for HDMI,
USB-A, USB-C, PC connectors**
DSD 35-00000-0000
-  **sockets TV+R+SAT**
terminal, attenuation 1 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5-8.3 mm
type designation on the product: ZAR-SAT 1.4/K
DSD 97-00000-0000
-  **sockets TV+R+SAT**
through, attenuation 10 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5-8.3 mm
type designation on the product: ZAR-SAT 10/P3
DSD 99-00000-0000
-  **sockets TV+SAT+SAT**
through, attenuation 10 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5-8.3 mm
type designation on the product: ZAR-SAT 10/P3
DSD 76-00000-0000
-  **sockets 2P+PE**
single socket with safety shutters and IP 20
covering lid, plastic base 16 A, 250 V AC
DSD 89-870YY-0000
-  **2P+PE sockets**
single, with safety shutters, plastic base
16 A, 250 V AC
DSD 89-810YY-0000
-  **2P+PE with OP sockets**
single, with safety shutters and overvoltage
protection (LIGHT INDICATION)
16 A, 250 V AC
DSD 84-840YY-0000
-  **2P+PE with OP sockets**
single, with safety shutters and overvoltage
protection (AUDIBLE ALARM)
16 A, 250 V AC
DSD 80-810YY-0000
-  **2P+PE schuko sockets**
single, with safety shutters
16 A, 250 V AC
DSD S2-830YY-0000
-  **2P+PE with OP schuko sockets**
single, with safety shutters and overvoltage
protection (LIGHT INDICATION)
16 A, 250 V AC
DSD S3-860YY-0000
-  **2x (2P+PE) sockets**
double, with safety shutters
16 A, 250 V AC
DSD 82-820YY-0000
-  **2x (2P+PE) OP sockets**
double, with safety shutters and with
overvoltage protection (LIGHT INDICATION)
16 A, 250 V AC I max 4.5 kA, Up < 1.2 kV
DSD 85-850YY-0000
-  **sockets schuko 2P+PE**
single socket with safety shutters and IP 20
covering lid, plastic base 16 A, 250 V AC
DSD S2-880YY-0000

sockets cover colours

- | | | | | | | | |
|---|---|---|-------------------------|---|------------------------|---|-----------------------|
|  | 01 snow white glossy |  | 35 white matt |  | 30 aluminium |  | 32 gold |
|  | 02 anthracite black glossy |  | 34 black matt |  | 31 graphite |  | 33 titanium |

i Power sockets always come in set with a cover of your choice.
Any connector from the accessories on page 76 can be selected for the support frame.

decente

hotel systems

*comfortable for guests, simple
and effective for staff*

The ACS-line Reception Hotel System by Estelar Company is designed to secure all activities related to running a hotel or pension. The system includes wall-mounted card readers and energy savers in Decente design available in all standard colours and materials which can match other switches and sockets in Decente design. One hotel card will allow room access, lift control, access to authorized areas (parking, wellness, etc.), payments in hotel bars and restaurants, use of other services (bike rental, ski passes, etc.).



ESTELAR
ELEKTRONICKE SYSTÉMY

card reader

Card reader (built-in card scanner) is a device for reading cards and controlling individual access according to permission. Typical use is e.g. opening of hotel entrance door, hotel room access, opening of wellness door within allowed time.



ORDER CODE:
DSD 00-CK0YY-H1XX

energy saver

The Energy Saver is a device that activates a function when a card is inserted and maintains it while the card remains inside. The device is equipped with a card reader and responds only to authorized cards, so it is not possible to replace the card with for example sturdy paper. Typical use is in hotel rooms, where wiring is active only in the presence of a guest, or for light control in meeting rooms, depending on occupancy. Connection of heating sensors for controlling room temperature is also available.



The producer of hotel card readers and hotel systems is ESTELAR, s. r. o.
More info to be found at www.acsline.cz.



Card readers are offered in DECENTE design with white, black or metallic cover.
Frame can be chosen from glass, wood, metal, plexi or plexiglass collection.



ORDER CODE:
DSD 00-HK0YY-H1XX



elegant


*conventional shape,
rounded lines*



A classic, unobtrusively elegant design with rounded lines and dozens of colours to choose from will create a harmonious relationship with any type of interior. Both frame and cover are made of high quality plastic. Soft pastel tones will gently bring up the atmosphere of your interior, while rich and colourful on the contrary will play the role of strong accent that draw attention to detail – the switch itself. We also offer our best-selling metallic colours: aluminium, graphite, gold and titanium.

custom switches

Our unique design allows you to combine any two colours within the frame. Your switch can then look maybe like

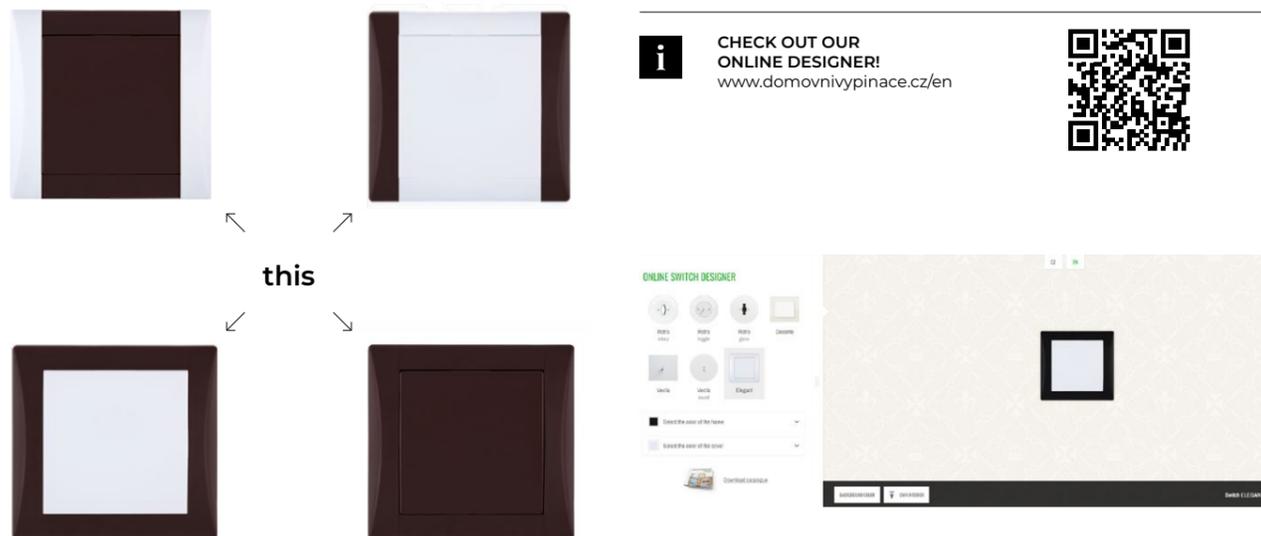

i Frames can be combined with covers of any colour. Unique frame design also allows a combination of base and side segments using any combination of two colours. We are always happy to advise you on the selection.

complex wiring solution in elegant design

The unusual design of the frame connection makes possible to create: up to seven horizontal or triple vertical combinations modul combinations up to 2x5 positions.

the product line includes

- switches, sockets, controllers
- ELEGANT Aqua (IP 44)
- ELEGANT Medical
- vacuum sockets
- thermostats
- motion sensors

for your cosy interior

Do you prefer a modern, but also cosy interior where you could use curtains, carpets and other decorations, that reflect your personal taste? Gentle tones of grey, beige and brown switches would fit right in. These colours are timeless and will give you freedom for further creativity when adding accessories to your interior.



cappuccino frame / cover cappuccino




steel grey frame / cover steel grey



titanium frame / outlet cover titanium grey



sets

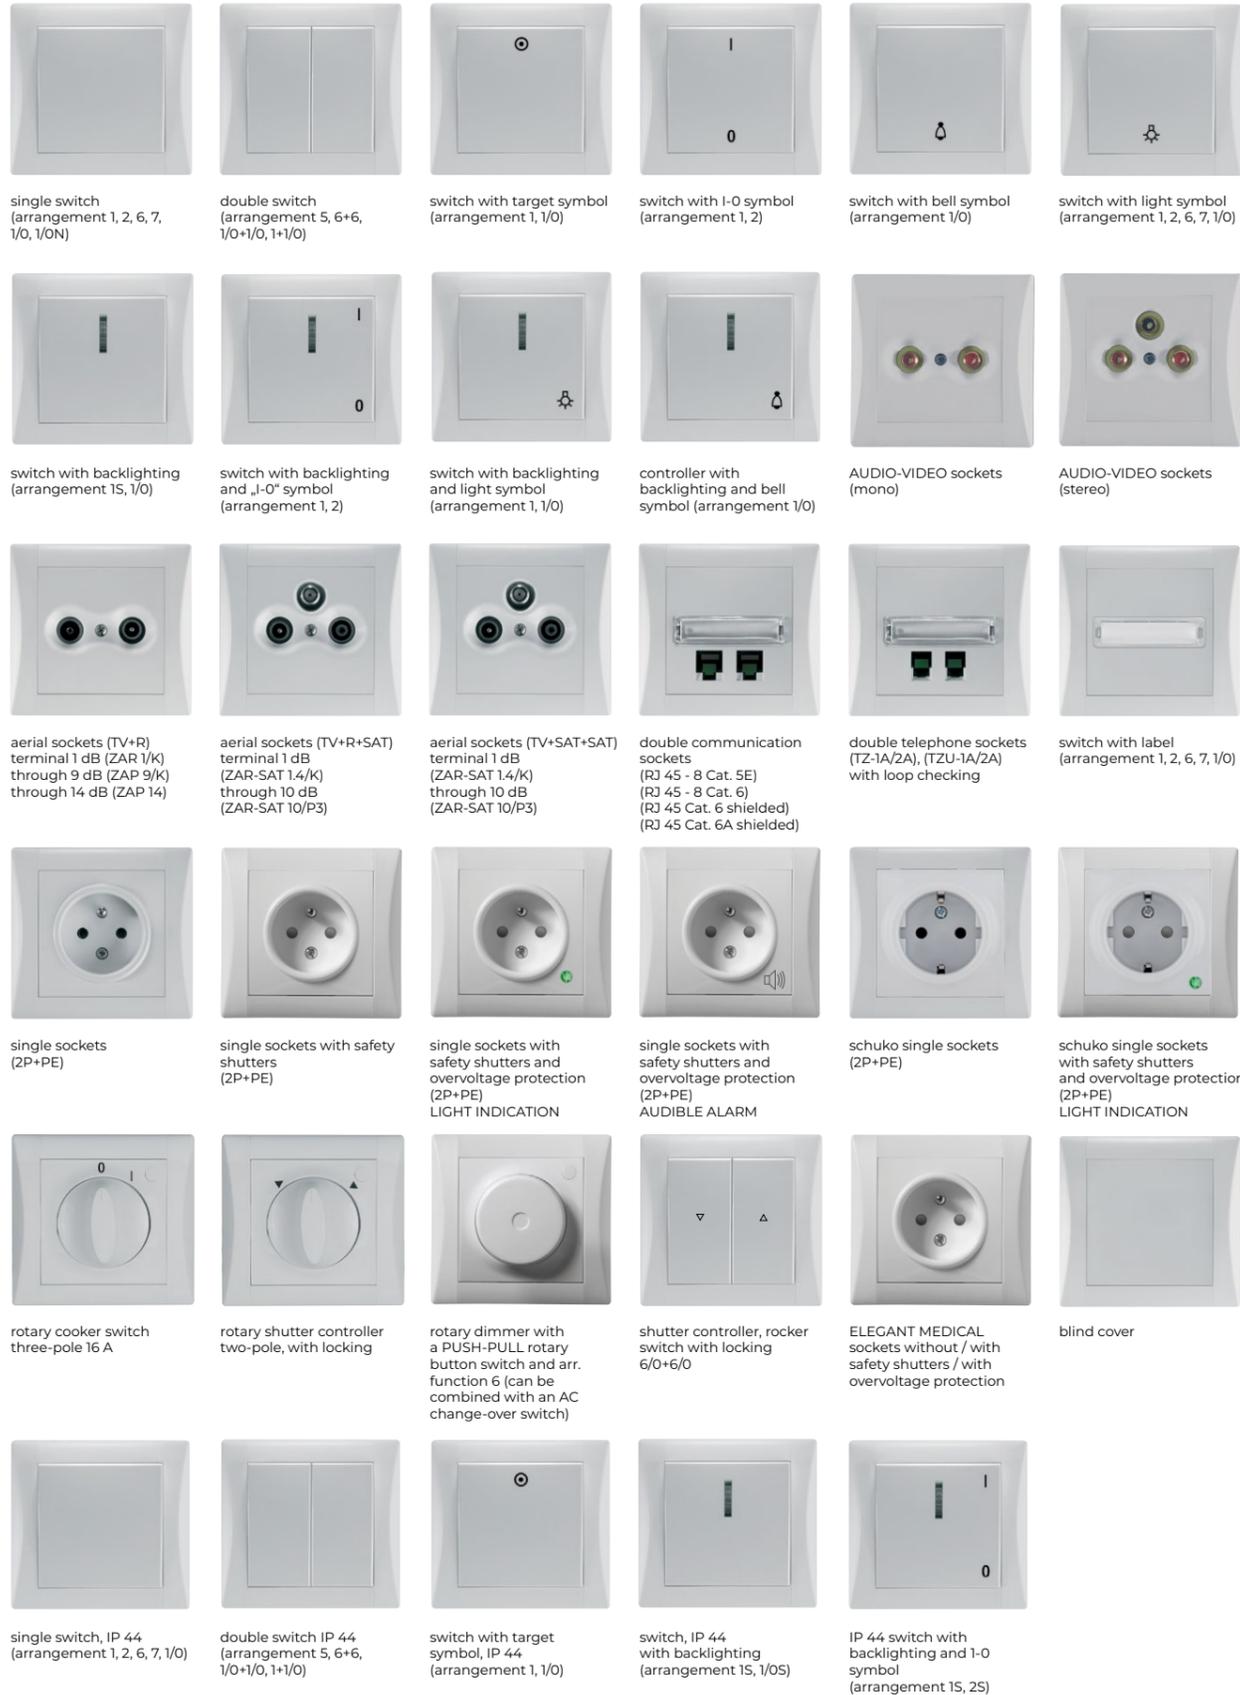

i Slightly rotated sockets cavities allow comfortable plugging in of two devices.



frames

| | | | | | | | |
|---|-------------------------------|---|--------------------------------|---|--------------------------|---|------------------------|
|  | 01 snow white |  | 06* peach orange |  | 18 cappuccino |  | 30 aluminium |
|  | 02 anthracite black |  | 08* ice green |  | 19 steel grey |  | 31 graphite |
|  | 03 smoke grey |  | 09* sunflower yellow |  | 20* olive grey |  | 32 gold |
|  | 04* vanilla yellow |  | 10 signal brown |  | 21 nut brown |  | 33 titanium |
|  | 05 sandy beige |  | 11* ruby red | | | | |

i * Until stocks are sold out. Colour tones may differ slightly from reality.

frame multiplicities

| | | | | | |
|---|---------------------|--|---|---------------------|--------------------------------|
|  | DSE 00-00000-11XXXX | dimensions (h*w) 84*89 mm |  | DSE 00-00000-21XXXX | dimensions (h*w) 155*89 mm |
|  | DSE 00-00000-82XXXX | double outlet frame dimensions (h*w) 115*89 mm |  | DSE 00-00000-31XXXX | dimensions (h*w) 226*89 mm |
|  | DSE 00-00000-12XXXX | dimensions (h*w) 84*160 mm |  | DSE 00-00000-22XXXX | dimensions (h*w) 155*160 mm |
|  | DSE 00-00000-13XXXX | dimensions (h*w) 84*231 mm |  | DSE 00-00000-23XXXX | dimensions (h*w) 155*231 mm |
|  | DSE 00-00000-14XXXX | dimensions (h*w) 84*302 mm |  | DSE 00-00000-24XXXX | dimensions (h*w) 155*302 mm |
|  | DSE 00-00000-15XXXX | dimensions (h*w) 84*373 mm |  | DSE 00-00000-25XXXX | dimensions (h*w) 155*373 mm |
|  | DSE 00-00000-16XXXX | dimensions (h*w) 84*444 mm | | | |
|  | DSE 00-00000-17XXXX | dimensions (h*w) 84*515 mm | | | |

i Please note that horizontal and vertical multiple frames have different design.

i ORDER CODE:
DSE 00-00000-XXXXXX

covers

- 

single cover
for switches:
1, 2, 6, 7, 1/0, 1/0N, 1N
DSE 00-010YY-000000
- 

single cover with backlighting with 0-1 symbol
for switches fitted with glow-lamp: 1, 1N, 2, 1/0, 1/0N
DSE 00-031YY-000000
- 

double cover
for switches:
5, 6+6, 1/0+1/0, 1/0+1
DSE 00-020YY-000000
- 

single cover with 0-1 symbol
for switches:
1, 2, 6, 7, 1/0
DSE 00-011YY-000000
- 

single cover with a labeling field
DSE 00-040YY-000000
- 

cover for shutter controller with rotary controller
DSE 00-216YY-000000
- 

single cover with target symbol
for switches: 1, 1/0
DSE 00-012YY-000000
- 

cover for a single sockets without safety shutters 2P+PE
DSE 00-810YY-000000
- 

cover for cooker switch with rotary controller
DSE 00-215YY-000000
- 

single cover with the bell symbol
for switches: 1/0
DSE 00-013YY-000000
- 

cover for a single sockets with safety shutters and overvoltage protection 2P+PE
DSE 00-840YY-000000
- 

double cover for shutter controller
DSE 00-026YY-000000
- 

cover for a dimmer / cover for LED dimmer
DSE 00-270YY-000000
DSE 00-230YY-000000
- 

schuko sockets cover ** with safety shutters 2P+PE
DSE 00-830YY-000000
- 

sockets cover double 2x (2P+PE)
DSE 00-820YY-000000
- 

blind cover
DSE 00-050YY-000000
- 

schuko sockets cover ** with safety shutters and overvoltage protection 2P+PE
DSE 00-860YY-000000
- 

cover for a double sockets with safety shutters 2x (2P+PE)
DSE 00-870YY-000000
- 

cover for a telephone outlet, double
DSE 00-910YY-000000
- 

sockets cover TV+R / AUDIO-VIDEO mono
DSE 00-940YY-000000
- 

cover for a double sockets with safety shutters and overvoltage protection 2x (2P+PE)
DSE 00-850YY-000000
- 

cover for a double communication outlet
DSE 00-930YY-000000
- 

sockets cover TV+R+SAT (TV+SAT+SAT) AUDIO-VIDEO stereo
DSE 00-970YY-000000
- 

single cover with backlighting for switches fitted with glow-lamp: 1, 1N, 2, 1/0, 1/0N
DSE 00-030YY-000000
- 

single cover with backlighting with light symbol for switches fitted with glow-lamp: 1, 1N, 2, 1/0, 1/0N
DSE 00-034YY-000000
- 

single cover with light symbol for switches: 1, 2, 6, 7, 1/0
DSE 00-014YY-000000
- 

single cover with backlighting with bell symbol for switches fitted with glow-lamp: 1/0, 1/0N
DSE 00-033YY-000000

i ORDER CODE:
DSE 00-YYYYY-000000

cover colours

- 

57 snow white
- 

06* peach orange
- 

18 cappuccino
- 

30 aluminium
- 

02 anthracite black
- 

08* ice green
- 

19 steel grey
- 

31 graphite
- 

03 smoke grey
- 

09* sunflower yellow
- 

20* olive grey
- 

32 gold
- 

04* vanilla yellow
- 

10 signal brown
- 

21 nut brown
- 

33 titanium
- 

05 sandy beige
- 

11* ruby red

i * Until stocks are sold out.
Colour tones may differ slightly from reality.

elegant aqua IP 44 covers

- 

single cover IP 44
for switches: 1, 2, 6, 7, 1/0
DSE 00-510YY-000000
- 

single cover IP 44 with target symbol
for switches: 1, 1/0
DSE 00-512YY-000000
- 

single cover IP 44 with backlighting
for switches fitted with a glow-lamp: 1, 1N, 2, 1/0, 1/0N
DSE 00-540YY-000000
- 

IP 44 single sockets cover with a lid and safety shutters 2P+PE
Available colours only 01, 30, 31, 32, 33.
The IP44 outlet is always supplied with a transparent (milk white) lid.
DSE 00-530YY-000000
- 




double cover IP 44
for switches: 5, 6+6, 1/0+1/0, 1/0+1
DSE 00-520YY-000000
- 

IP 44 schuko sockets cover with a lid and safety shutters 2P+PE
Available colours only 01, 30, 31, 32, 33.
The IP44 outlet is always supplied with a transparent (milk white) lid.
DSE 00-530YY-000000
- 

single cover IP 44 with backlighting and 0-1
for switches fitted with a glow-lamp: 1, 1N, 2, 1/0, 1/0N
DSE 00-541YY-000000

i For ELEGANT AQUA cover colours go to page 63.

fittings

-  **fitting, arrangement 1**
singlepole switch
10 AX, 250 V AC
DSE 01-00000-000000
-  **fitting, arrangement**
in singlepole switch
with zero terminal
10 AX, 250 V AC
DSE 12-00000-000000
-  **fitting, arrangement 2**
twopole switch
10 AX, 250 V AC
DSE 02-00000-000000
-  **fitting, arrangement 5**
serial change-over switch
10 AX, 250 V AC
DSE 05-00000-000000
-  **fitting, arrangement 6**
AC change-over switch
10 AX, 250 V AC
DSE 06-00000-000000
-  **fitting, arrangement 6+6 (6+1)**
AC change-over switch, double
10 AX, 250 V AC
DSE 66-00000-000000
-  **fitting, arrangement 7**
crossbar switch
10 AX, 250 V A
DSE 07-00000-000000
-  **fitting, arrangement 1/0**
switching controller
10 AX, 250 V AC
DSE 10-00000-000000
-  **fitting, arrangement 1/0+1/0**
double switching controller
10 AX, 250 V AC
Ize použít jako žaluziový ovladač bez blokace
DSE 11-00000-000000
-  **fitting, arrangement 6/0+6/0**
shutter switch with locking
10 AX, 250 V AC
DSE 16-00000-000000
-  **fitting, arrangement 1**
ON switching controller with zero terminal
10 AX, 250 V AC
DSE 13-00000-000000
-  **fitting, arrangement 1/0+1**
switching controller + singlepole switch
10 AX, 250 V AC
DSE 14-00000-000000
-  **fitting, arrangement 1+1**
singlepole switch + singlepole switch
10 AX, 250 V AC
DSE 15-00000-000000

-  **fitting, arrangement 1/0 +1/0,**
press button, up to 24 V
50 mA, 24 V DC
DSE 17-00000-000000
-  **fitting, arrangement 1/0,**
press button, up to 24 V
50 mA, 24 V DC
DSE 18-00000-000000
-  **fitting for cooker switch, rotary**
threepole
16 A, 400 V AC
DSE 21-00000-000000
-  **fitting for shutter controller, rotary**
(with locking)
10 A, 230 V AC
DSE 22-00000-000000
-  **fitting for rotary dimmer**
with arrangement 6
230 V AC,
load 40–250 W
DSE 27-00000-000000
-  **fitting for LED dimmer**
230 V AC, load
0–100 W LED, 10–250 W
incandescent light bulb
DSE 23-00000-000000
-  **telephone sockets double**
TZ-1A2A
connectors black
DSE 91-00000-000000
-  **telephone sockets double,**
with loop checking
TZU-1A2A
connectors black
DSE 92-00000-000000
-  **communication sockets Cat. 5E double**
2× RJ 45 Cat. 5E
for UTP cable
connectors black
DSE 93-00000-000000
-  **communication sockets Cat. 6 double**
2× RJ 45 Cat. 6
for UTP cable
connectors black
DSE 98-00000-000000
-  **communication sockets Cat. 6 double**
2× RJ 45 Cat. 6 shielded
for STP cable
connectors black
DSE 74-00000-000000
-  **communication sockets Cat. 6A double**
2× RJ 45 Cat. 6A shielded
for STP cable
connectors black
DSE 75-00000-000000

-  **TV+R sockets terminal**
attenuation 1 dB, 350 mA, 24 V DC
for coaxial cables of diameter 4.5–8.3 mm
designation on the product: ZAR 1/K
DSE 94-00000-000000
-  **TV+R sockets through**
branching attenuation 9 dB
for coaxial cables of diameter 4.5–8.3 mm
designation on the product: ZAP 9/K
DSE 95-00000-000000
-  **TV+R sockets through**
branching attenuation 14 dB
for coaxial cables of diameter 4.5–8.3 mm
designation on the product: ZAP 14
DSE 96-00000-000000
-  **TV+R+SAT sockets**
terminal, attenuation 1 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5–8.3 mm
designation on the product: ZAR-SAT 1.4/K
DSE 97-00000-000000
-  **TV+R+SAT sockets**
through, attenuation 10 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5–8.3 mm
designation on the product: ZAR-SAT 10/P3
DSE 99-00000-000000
-  **TV+SAT+SAT sockets**
through, attenuation 10 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5–8.3 mm
designation on the product: ZAR-SAT 10/P3
DSE 76-00000-000000
-  **passive switch for intelligent systems**
50 mA, 12 or 24 V DC
DSE KC-00000-000000
-  **AUDIO-VIDEO sockets**
mono (1+1)
DSE 71-00000-000000
-  **AUDIO-VIDEO sockets**
stereo (2+1)
DSE 72-00000-000000
-  **terminal for potential equalization**
protective bonding outlet 5× terminal
up to 2.5 mm², 1× terminal up to 6 mm
DSE 79-79001-000000
-  **2P+PE sockets**
single
16 A, 250 V AC
DSE Z1-810YY-000000

-  **2P+PE sockets**
single with safety shutters
16 A, 250 V AC
DSE 89-890YY-000000
-  **2P+PE with OP sockets**
single with safety shutters and overvoltage protection,
(LIGHT INDICATION) 16 A, 250 V AC, I max 4.5 kA,
Up < 1.2kV
DSE 84-840YY-000000
-  **2P+PE with OP sockets**
single with safety shutters and overvoltage protection,
(AUDIBLE ALARM) 16 A, 250 V AC, Up < 1.2 kV
DSE 80-890YY-000000
-  **2P+PE schuko sockets****
single
16 A, 250 V AC
DSE S1-830YY-000000
-  **2P+PE schuko sockets****
single with safety shutters
16 A, 250 V AC
DSE S2-830YY-000000
-  **2P+PE with OP schuko sockets****
single with safety shutters and overvoltage protection,
(LIGHT INDICATION), 16 A, 250 V AC
DSE S3-860YY-000000
-  **2P+PE, IP 44 sockets**
with lid and safety shutters 16 A, 250 V AC
DSE 89-530YY-000000

Available colour only 01, 30, 31, 32, 33.
IP 44 outlet is always supplied with transparent (milk white) lid.
-  **2P+PE schuko sockets**
with lid and safety shutters 16 A, 250 V AC
DSE S2-550YY-000000

Available colour only 01, 30, 31, 32, 33.
IP 44 outlet is always supplied with transparent (milk white) lid.
-  **2× (2P+PE) sockets**
double
16 A, 250 V AC
DSE 82-820YY-000000
-  **2× (2P+PE) sockets**
double with safety shutters (ELEGANT only)
16 A, 250 V AC
DSE 87-870YY-000000
-  **2× (2P+PE) with OP sockets**
double with safety shutters and overvoltage
protection (LIGHT INDICATION)
16 A, 250 V AC, I max 4.5 kA, Up < 1.2 kV
DSE 85-850YY-000000

i ** Availability of schuko sockets is upon request.

elegant

aqua IP 44

*safety first not only
in your bathroom*



IP 44 switches and sockets

ELEGANT AQUA series devices are designed for flush mounting and are supplied with IP 44 protection. These can be used in dusty, damp environments (bathrooms, warehouses, workshops, garages etc.) or outdoor areas.

| | | | | | | |
|----------------|---------------------------------------|---|-------------------------------------|---------------------------------------|--|--|
| | | | | | | |
| XXXX = YY = | 2001 - olive grey * 01 - white | 1901 - steel grey 01 - white | 1801 - cappuccino 01 - white | 2101 - nut brown 01 - white | 1101 - ruby red * 01 - white | |
| | | | | | | |
| XXXX = YY = | 0401 - vanilla yellow * 01 - white | 0901 - sunflower yellow * 01 - white | 0601 - peach orange * 01 - white | 1001 - signal brown 01 - white | 0101 - snow white 01 - white | |
| | | | | | | |
| XXXX = YY = | 0501 - sandy beige 01 - white | 0801 - ice green * 01 - white | 0301 - smoke grey 01 - white | 0201 - anthracite black 01 - white | | |
| | | | | | | |
| XXXX = YY = | 3030 - aluminium 01 - white | 3131 - graphite 01 - white | 3232 - gold 01 - white | 3333 - titanium 01 - white | single sockets with transparent lid | |
| | | | | | | |
| XXXX = YY = | 3030 - aluminium 30 - aluminium | 3131 - graphite 31 - graphite | 3232 - gold 32 - gold | 3333 - titanium 33 - titanium | schuko sockets with transparent lid | |



Only the colour combinations shown are available for the IP 44 in the ELEGANT range. The IP 44 sockets is always supplied with a transparent (milk white) lid.



ORDER CODE:
DSE 00-510YY-51XXXX



IP 44 protection can be used with sockets and switches (arrangements 1, 2, 6, 7, 1/0, 5, 6+6, 1/0+1/0, 1+1/0).

* Until stocks are sold out.

elegant

vacuum sockets



vacuum sockets

ELEGANT vacuum sockets are designed to be installed in modern interiors. Colours and shape perfectly match ELEGANT switches and socket sockets. They are compatible with BEAM central vacuuming systems.

| | | | | | | |
|----------------|---------------------------------------|---|-------------------------------------|----------------------------------|--------------------------------------|---------------------------------------|
| | | | | | | |
| XXXX = YY = | 2001 - olive grey * 01 - white | 1901 - steel grey 01 - white | 1801 - cappuccino 01 - white | 2101 - nut brown 01 - white | 1001 - signal brown 01 - white | 0201 - anthracite black 01 - white |
| | | | | | | |
| XXXX = YY = | 0401 - vanilla yellow * 01 - white | 0901 - sunflower yellow * 01 - white | 0601 - peach orange * 01 - white | 1101 - ruby red * 01 - white | 0501 - sandy beige 01 - white | 0801 - ice green * 01 - white |
| | | | | | | |
| XXXX = YY = | 3001 - aluminium 01 - white | 3101 - graphite 01 - white | 3201 - gold 01 - white | 3301 - titanium 01 - white | 0301 - smoke grey 01 - white | 0101 - snow white 01 - white |
| | | | | | | |
| XXXX = YY = | 3030 - aluminium 01 - white | 3131 - graphite 01 - white | 3232 - gold 01 - white | 3333 - titanium 01 - white | | |
| | | | | | | |
| XXXX = YY = | 3030 - aluminium 30 - aluminium | 3131 - graphite 31 - graphite | 3232 - gold 32 - gold | 3333 - titanium 33 - titanium | assembly plate DSE 26-00000-00000 | |



ELEGANT vacuum cleaners are only available in the colour combinations shown. The mounting plate is not included, but you can order it separately as an accessory. Vacuum sockets are supplied in set only.



ORDER CODE:
DSE 73-730YY-73XXXX

* Until stocks are sold out.



elegant

medical



Colour sockets are used to clearly resolve circuits with different types of back-up power supply (distributions for healthcare, data and computer networks, etc.). The ELEGANT Medical line can be combined with other ELEGANT switches and sockets for a complex wiring solution within a building.

colour coding of socket sockets



snow white frame / cover green medical

green - critical circuit

Green sockets cover plates are used for connecting equipment that must have restored provision of emergency power from the main emergency source (usually a diesel generator with auto-start) within a maximum of 2 minutes of a power failure from the primary source. This emergency source supplies electricity for the entire duration of the interruption of the primary source.



snow white frame / cover yellow medical

yellow - medical isolated circuit

Yellow sockets cover plates are used exclusively for connecting medical equipment essential for sustaining the life and health of patients. The nature of use of this equipment means that its power cannot be interrupted in the event of a fault within the circuit. A medical isolated power system therefore allows operation to continue even in such situations, while the circuit failure is visually and acoustically signalled. Since a further failure could then lead to interruption of system power, it is vital to repair the failure immediately after finishing the ongoing operation. Medical isolated power system is powered from critical circuits. This means that emergency power from the main back-up source is secured within 2 minutes.



snow white frame / cover orange medical

orange - highly critical circuit

Orange sockets cover plates are designated for power sockets of highly critical circuits whose power may not be interrupted for more than 15 seconds. This will principally involve a medical isolated power system with an even higher level of provision of emergency electrical power supply, because the primary winding of its protective isolation transformer is fed from the UPS, almost always operated in on-line mode (without interruption of the power supply to connected equipment). As the emergency source will have a limited output and operating time, this type of outlet may only be used to supply medical equipment which supports or substitutes basic life functions, which does not have emergency power provided by other means, and for which the power recovery time of the main emergency source is too long.



snow white frame / cover snow white

white - less critical circuit

White sockets cover plates are designated for connecting routine equipment and appliances (cookers, refrigerators, coffee machines, cleaning equipment etc.). Medical equipment can be connected to these circuits only in exceptional, emergency situations, when there is no power in the other sockets (green, yellow or orange).



snow white frame / cover signal brown

brown - less critical circuit

Brown cover plates designate sockets of less critical circuits with their protection increased by residual-current devices. They are designated for medical and non-medical equipment where increased protection against electric shock is appropriate or necessary. A connection to a less critical circuit with a residual-current device is designated by the letter code MF.



snow white frame / cover red medical

red - less critical circuit

Red cover plates are recommended for sockets designated for connecting computers and their accessories into circuits with their own UPS.

sets



single elegant medical sockets (2P+PE)



single elegant medical sockets with safety shutters (2P+PE)



single elegant medical sockets with safety shutters and overvoltage protection (2P+PE) LIGHT INDICATION



double elegant medical sockets 2x (2P+PE)



double elegant medical sockets with safety shutters 2x (2P+PE)



double elegant medical sockets with safety shutters and overvoltage protection 2x (2P+PE) LIGHT INDICATION



single sockets with operational status indicator



terminal for equalizing potential (sockets for protective bonding)

covers



single sockets cover with safety shutters 2P+PE
DSE 00-810YY-000000



double sockets cover with safety shutters 2x (2P+PE)
DSE 00-870YY-000000



single sockets cover with safety shutters and overvoltage protection 2P+PE
DSE 00-840YY-000000



double sockets cover with safety shutters and overvoltage protection 2P+PE
DSE 00-850YY-000000

medical cover colours



14 orange medical



15 yellow medical



16 green medical



17 red medical



10 signal brown



01 snow white



Colour tones may differ slightly from reality.




ORDER CODE:
DSE 00-YYYYY-000101



thermostats and motion sensors

avant, nexa, retro,
decente, elegant design

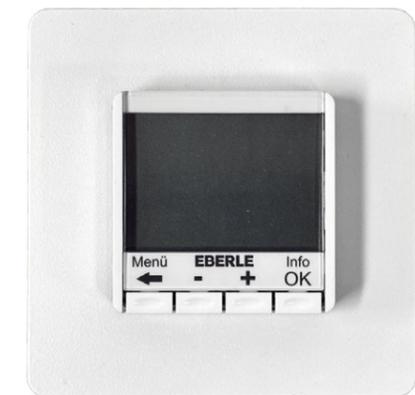

Various thermostats and motion sensors can be aligned in the same design as the rest of the switches and sockets. Motion sensors automatically switch most often lighting and are useful mainly in the premises with frequent movement of people. Thermostats observe room temperature and optimally regulate heating, some allow you to set different time scenarios. Choose reliable devices from a wide range of materials and colours among our AVANT, NEXA, RETRO, DECENTE or ELEGANT products.



EBERLE

thermostats




| PRODUCT | THERMOSTAT RTR-E 8011-50 | THERMOSTAT FRE L2A-50 LIMITER | THERMOSTAT FIT 3U | THERMOSTAT FIT 3U | THERMOSTAT FIT 3U |
|--------------------|---|--|--|---|--|
| order code | DSE 2T, DSD 2T*, DSR 2T, DSN 2T, DSA 2T | DSE 3T, DSD 3T*, DSR 3T, DSN 3T, DSA 3T | DSE 4T, DSD 4T*, DSR 4T, DSN 4T, DSA 4T | DSE 4T, DSD 4T*, DSR 4T, DSN 4T, DSA 4T | DSE 4T, DSD 4T*, DSR 4T, DSN 4T, DSA 4T |
| description | analogue thermostat under plaster mounting ROOM (modular 50x50) | analogue thermostat under plaster mounting FLOOR (modular 50x50) with sensor | digital thermostat under plaster mounting ROOM (modular 50x50) | digital thermostat under plaster mounting FLOOR** (modular 50x50) | digital thermostat under plaster mounting COMBINED** (modular 50x50) |
| dimensions (h×w×d) | 84×89×42 mm | 84×89×42 mm | 84×89×42.5 mm | 84×89×42.5 mm | 84×89×42.5 mm |
| temperature range | 10–40 °C | 10–40 °C | 5–30 °C | 10–40 °C | 10–40 °C room a 10–40 °C floor |
| contact (relay) | switching (AC 230 V) | switching (AC 230 V) | switching (AC 230 V) | switching (AC 230 V) | switching (AC 230 V) |
| working voltage | AC 230 V 50 Hz | AC 230 V 50 Hz | AC 230 V 50 / 60 Hz | AC 230 V 50 / 60 Hz | AC 230 V 50 / 60 Hz |
| switching current | 10 (4) A | 10 (4) A | 10 mA–10 (4) A | 10 mA–16 (4) A | 10 mA–10 (4) A |
| hysteresis | cca 1 K | cca 1 K | in steps of 0.1°C | in steps of 0.1° | in steps of 0.1° |
| regulation | ON/OFF | ON/OFF | PWM or ON/OFF | PWM or ON/OFF | PWM or ON/OFF |
| protection | IP 30 | IP 30 | IP 30 | IP 30 | IP 30 |

i * If you order an ELEGANT frame, order the device with code DSE xT. If device is used with DECENTE design, proceed with code DSD xT. If device is used with RETRO design, proceed with code DSR xT. NEXA Quadro frame is used with DSN XT device + DSN RQ-T0000-11xx frame. Avant frame is used with DSA XT device + DSA RA-T0000-11xx frame.
 ** Floor sensor is sold separately.




| PRODUCT | FLOOR SENSOR |
|--------------------|--|
| order code | DSE 56, DSD 56, DSR 56, DSN 56, DSA 56 |
| description | floor sensor for EBERLE thermostats |
| dimensions (h×w×d) | 4 m |
| temperature range | 0–70 °C |


i If you order a floor sensor for thermostats in the ELEGANT range, use code DSE 56, in the DECENTE range code DSD 56, in the RETRO range code DSR 56, in the NEXA range code DSN 56, in the AVANT range code DSA 56.

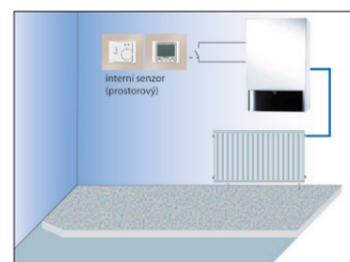

ROOM THERMOSTATS
 Allow measurement of room temperature using an intergrated room sensor and regulation (swit-ching) of e.g. central heating boilers (potential-free contact).



FLOOR THERMOSTATS
 Used mainly for controlling the temperature of underfloor heating using an external sensor. Can also be used for sensing and regulation in other media (tubes, liquids, solid and loose materials etc.).



COMBINED THERMOSTATS
 Temperature can thus be regulated using an internal or external sensor. Used with e.g. underfloor heating, where room sensor works as the main sensor and floor sensor as protection against overheating.



| PRODUCT | PIR SENSOR 180-R | PIR SENSOR 180-T | PIR SENSOR 180-R-2D | PIR SENSOR 180-TR |
|--------------------|---|--|---|--|
| order code | DSE B1 / DSD B1' / DSR B1 - B1001 | DSE B2 / DSD B2' / DSR B2 - B1001 | DSE B3 / DSD B3' / DSR B3 - B1001 | DSE B4 / DSD B4' / DSR B4 - B1001 |
| description | Wall-mounted motion detector with acoustic sensor. Relay version in three-wire technology. Automatic extension of transition time through sounds. Possible manual button control. | Wall-mounted motion detector with acoustic sensor. Triac design with 2-wire technology, without zero conductor. Only for ohmic loads. Automatic extension of transition time through sounds. | Wall-mounted motion detector with acoustic sensor. Relay design with 2-wire technology thanks to built-in battery. Automatic extension of transition time through sounds. | Wall-mounted motion detector designed for switching staircase automatic lights. Triac design with 2-wire without zero-conductor. It guarantees perfect operation with LUXOMAT® SCT1 (up to 10 detectors per device). |
| dimensions (h×w×d) | mounting depth 36 mm | mounting depth 36 mm | mounting depth 36 mm | mounting depth 36 mm |
| power | 2 300 W, cos φ = 1 1 150 W, cos φ = 0,5 | 300 W / min. 40 W cos φ = 1 not suitable for LED | 2 300 W cos φ = 1 not suitable for LED | max. 200 mA / 230 V |
| voltage | 110–240 V AC 50 / 60 Hz | 110–240 V AC 50 / 60 Hz | 110–240 V AC 50 / 60 Hz 5× NiMH / 30 AAAA, 1.2 V / 200 mA | 110–240 V AC , 50 / 60 Hz operation via a staircase automat (230 V) |
| coverage angle | 180° vertically | 180° vertically | 180° vertically | 180° vertically |
| range | max. 10 m | max. 10 m | max. 10 m | max. 10 m |
| twilight setting | 2–2 000 lux | 2–2 000 lux | 2–2 000 lux | 2–2 000 lux |
| time setting | 15 s – 16 min nor bell impulse | 15 s – 16 min nor bell impulse | 15 s – 16 min nor bell impulse | impulse duration 0.1 s |
| protection | IP 20 / class II | IP 20 / class II | IP 20 / class II | IP 20 / class II |

| PRODUCT | PIR SENSOR 180 M 2C | PIR SENSOR 180 S | PIR SENSOR 180-R-11-48V | PIR SENSOR 180-KNX |
|--------------------|---|--|---|---|
| order code | DSE B5 / DSD B5' / DSR B5 - B1001 | DSE B6 / DSD B6' / DSR B6 - B1001 | DSE B7 / DSD B7' / DSR B7 - B1001 | DSE B8 / DSD B8' / DSR B8 - B1001 |
| description | Wall-mounted presence detector, master model. Switching channel for switching the light on. Potential-free HVAC contact. Possible extension of detection range with slave devices. Automatic extension of transition time through the sounds. | Wall-mounted presence detector, slave model. To extend the detection range of master model. Compatible with all master devices except: PD4-M- DS-FC, 11-48V devices, PD9-M- SDB. | Wall-mounted motion detector with acoustic sensor with operating voltage 11–48 V. Potential-free switching contact. Possible manual button control. | Wall-mounted presence detector KNX with acoustic sensor and integrated BUS connector. When using B.E.G._Occupancy detector_928XX_V5.0, several operating modes are available: |
| dimensions (h×w×d) | mounting depth 36 mm | mounting depth 36 mm | mounting depth 36 mm | mounting depth 36 mm |
| power | channel 1 (lighting check): 2 300 W, cos φ = 1 1 150 VA, cos φ = 0,5 channel 2 (HVAC check): 3 A, 230 V, cos φ = 1 | slave | 3 A cos φ = 1 | KNX |
| voltage | 110–240 V AC 50 / 60 Hz | 110–240 V AC 50 / 60 Hz | 11–48 V AC / DC | KNX |
| coverage angle | 180° vertically | 180° vertically | 180° vertically | 180° vertically |
| range | max. 10 m | max. 10 m | max. 10 m | max. 10 m |
| twilight setting | 2–2 000 lx | 2–2 000 lx | 2–2 000 lx | 2–2 000 lx |
| time setting | channel 1: 15 s – 30 min, impuls channel 2: 5 min – 120 min, impuls, alarm impuls | impuls 2 s or 9 s | impuls 15 s – 30 min | |
| protection | IP 20 / class II | IP 20 / class II | IP 20 / class II | IP 20 / class II |

i * Motion sensors can be implemented into ELEGANT (use DSE XX), DECENTE (use DSD XX) or RETRO design (use DSR XX).



Passive switches for intelligent systems

avant, nexa, retro,
decente, elegant design



Passive switches represent a modern and elegant solution for intelligent homes that emphasize comfort, efficiency and aesthetics. Thanks to their compact design, fast response and ability to connect with smart systems, they enable easy control of lighting and other household devices. They are an ideal choice for those who want to increase the comfort of their living space while maintaining a clean, minimalist interior design.

Overall, they represent a flexible, economical and design clean solution for anyone who wants to take their home to a higher level of comfort and automation.

**For control
are used:**

- passive switches
- touch panels
- devices using iOS or Android
- control via TV / LAN
- sensors and other controllers connected to the bus

accessories



spacer VK1
fills up the gap between installation box and fitting
DSE 29-00000-000000



spacer VK2
fills up the gap between installation box and fitting
DSE 30-00000-000000



HDMI-A keystone
female-female, 4K, 60 Hz, 1 pc
3453685 black
3453686 white



USB-A keystone-charger
2.1 A, 10,5 W, 1 pc
3450546 black
3453672 white



USB-C keystone-charger
2.1 A, 10,5 W, 1 pc
3453678 black
3453679 white



TV keystone
IEC (koax) male - female, Z=75 Ω
3453702 black
3453701 white



SAT keystone
female - female, Z=75 Ω
3453691 black
3453692 white



RJ45 CAT5E keystone
UTP unshielded
3450062 black
3450075 white



RJ45 CAT6 keystone
UTP unshielded
3450063 black
3453676 white



PC connector Cat. 5E
RJ 45 black plastic
set of 2 pcs
for UTP cable
DSE 33-00000-000000



PC connector Cat. 6
RJ 45 black plastic
set of 2 pcs
for UTP cable
DSE 34-00000-000000



PC connector Cat. 6 shielded
RJ 45 Cat. 6
set of 2 pcs
for STP cable
DSE 24-00000-000000



PC connector Cat. 6A shielded
RJ 45 Cat. 6A
set of 2 pcs
for STP cable
DSE 25-00000-000000



support frame for PC connectors
for DECENTE and ELEGANT line
DSE 35-00000-000000



support frame for HDMI, USB-A, USB-C, PC connectors
for DECENTE line
DSD 35-00000-0000



support frame for data socket
for AVANT line
DSA 90-00000



supplementary frame for the DECENTE range
DSD 00-00000-R100



supplementary frame for the DECENTE Mini range
DSI 00-00000-R100

accessories



glow lamp (for DECENTE line)
230 V, 2 MA
DSD 3A-00000-000000 orange
230 V, 0,5 MA
DSD 3B-00000-000000 green
DSD 3C-00000-000000 blue



glow lamp (for ELEGANT line)
230 V, 2 MA
DSE 3A-00000-000000 orange
230 V, 0,5 MA
DSE 3B-00000-000000 green
DSE 3C-00000-000000 blue



connector CINCH AUDIO-VIDEO mono
set of 2 pcs
DSE 38-00000-000000



connector CINCH AUDIO-VIDEO stereo
set of 3 pcs
DSE 39-00000-000000



fixative spurs (claws)
set of 2 pcs
DSE 37-00000-000000



single box for strip distribution systems
(only for ELEGANT)
DSE 31-00000-000000



double outlet box for strip distribution systems
(only for ELEGANT)
DSE 36-00000-000000




5103 MDE mounting plate
for central vacuum cleaner sockets
DSE 26-00000-000000

Supplementary frames are installed between the switch frame and the wall and are intended for DECENTE and DECENTE Mini frames.




wiring diagrams

switch arrangement 1 (singlepole switch)




Used to control one device or one device group from one place. For other switches there is only one device in a given switching circuit considered.

switch arrangement 1+1+1




switch arrangement 2 (twopole switch)




Usually used where it is needed to turn off work and central wire at the same time.

switch arrangement 5 (serial change-over switch, singlepole) two circuit switch with switched-off position)




For controlling two electrical circuits from one spot.

single outlet




Connects electrical device to electricity grid. Safety sockets are also available: outlet with safety shutters, IP 44 outlet.

double sockets

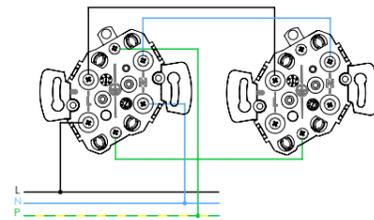


Double outlets connects electrical devices to electricity grid

switch arrangement 6 stair switch (change-over switch), singlepole 2-way switch without switched off position

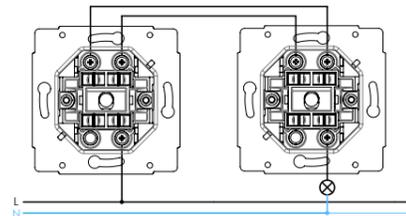


Classic control of staircase or hallway lighting from two spots.

switch arrangement 6+6 double stair switch (serial change-over switch)

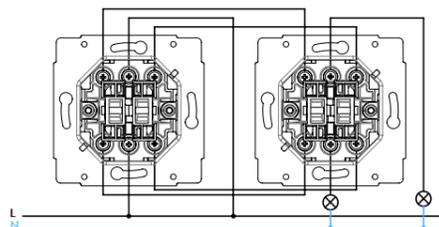

For controlling two electrical circuits from two spots.


switch arrangement 6+7+6 change-over switch - cross-bar switch - change-over switch

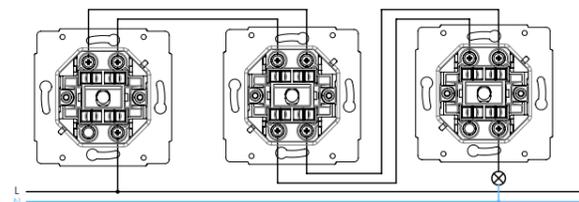


Between two switches 6, any number of switches 7 can be placed.

wiring diagram for retro (cam switch)


arrangement 1

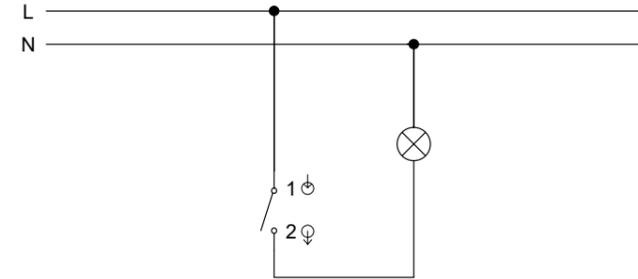


arrangement 2

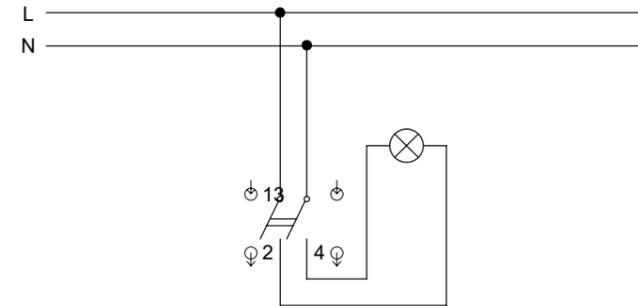


arrangement 5

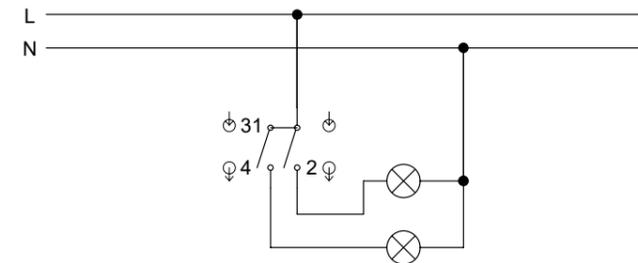

arrangement 6

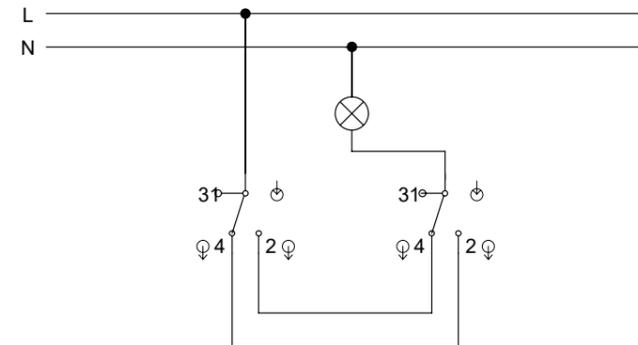


arrangement 6+7+6

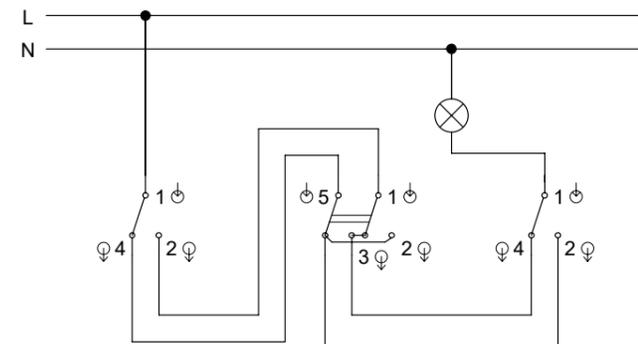


nexa

frames rondo


single frame



double frame horizontal and vertical




triple frame horizontal and vertical

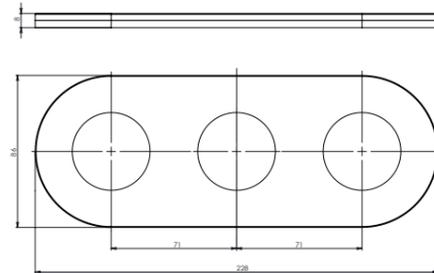


frames quadro


single frame



double frame horizontal and vertical




triple frame horizontal and vertical

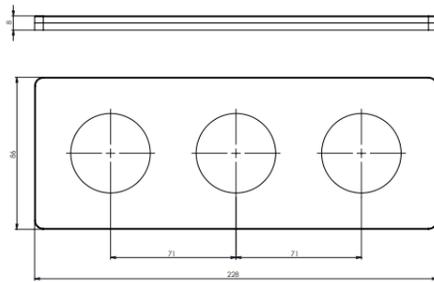


fittings rondo / quadro

house switch arrangement 1, 2, 5, 6




house switch arrangement 5, 6+6, 6/0+6/0




nexa

fittings rondo / quadro


house switch with frame arrangement 1, 2, 6, 7, 1/0




house switch with frame arrangement 5, 6+6, 6/0+6/0

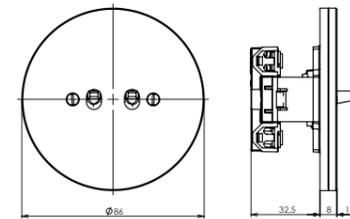


single sockets




single sockets with frame




schuko single sockets




schuko single sockets with frame




hdmi, usb, tv, sat, pc, rj 45 sockets + outlet charging




single socket british standard



double socket british standard

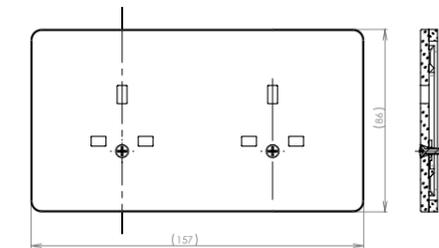


thermostat - only in quadro collection

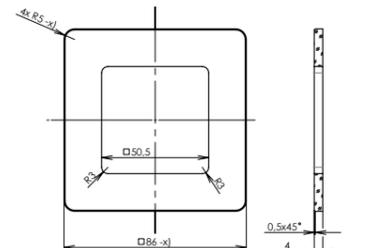


retro

frames

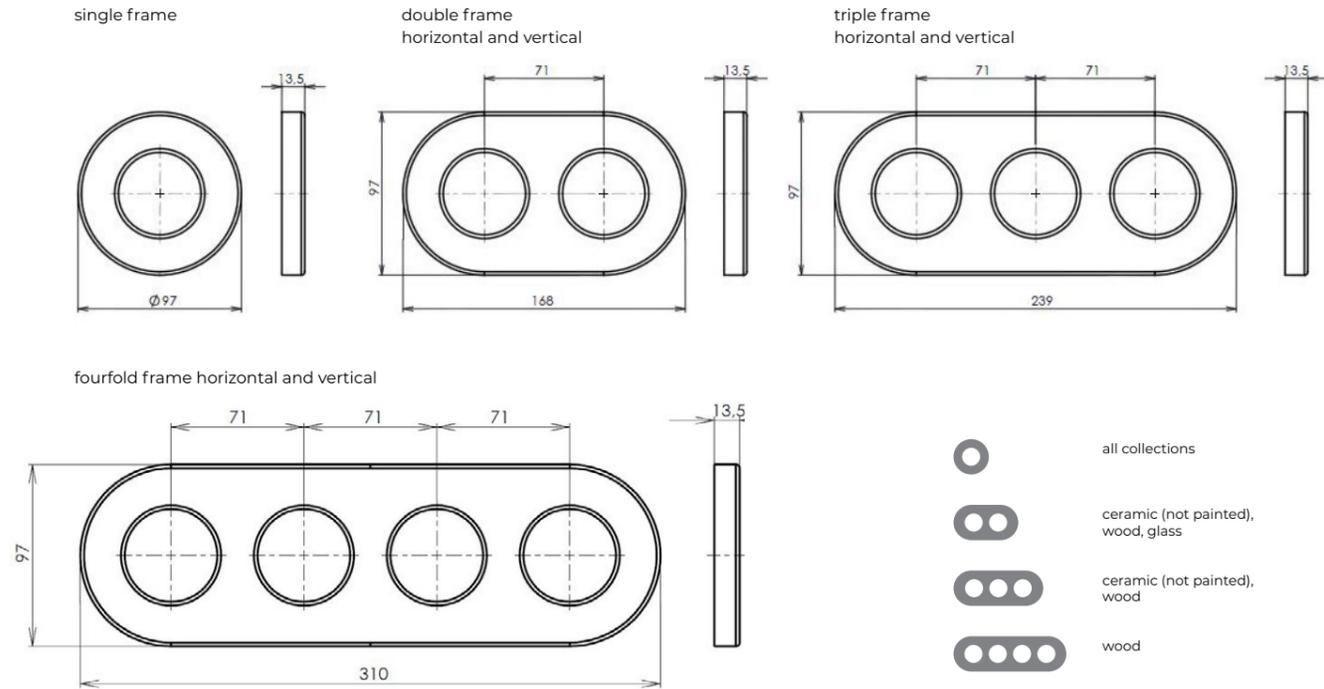


i Multiple frames can be installed both horizontally and vertically (are compatible).

frames for glass collection

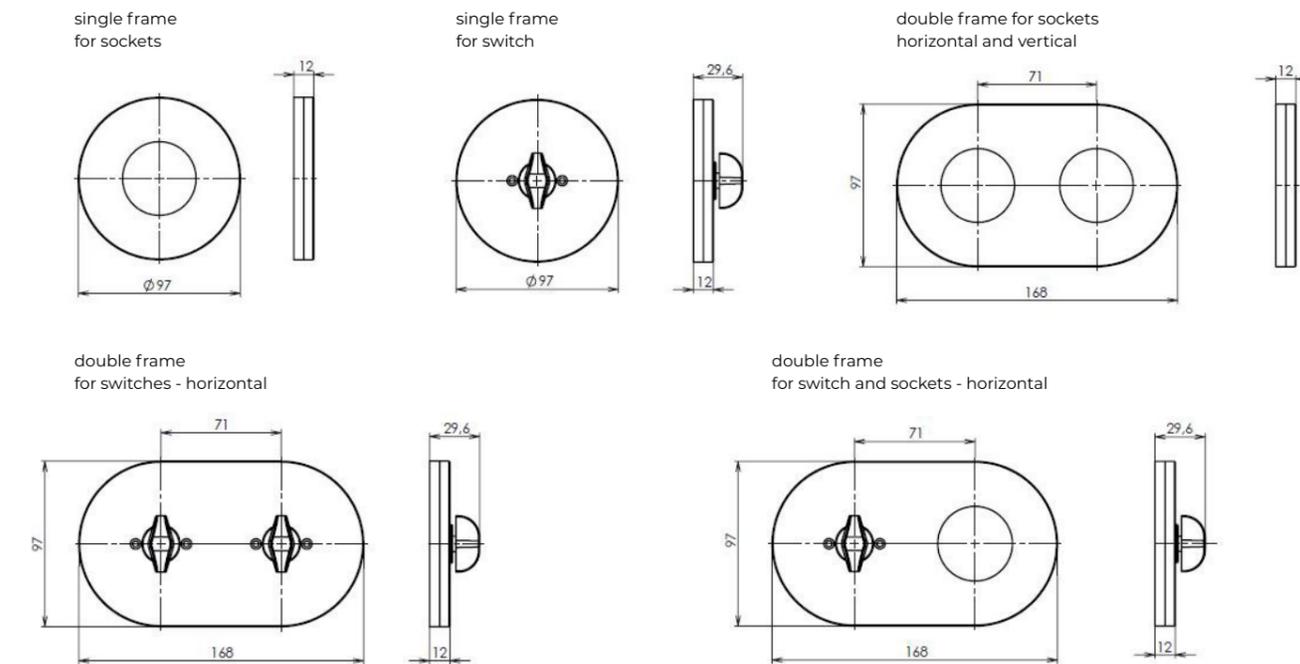

retro


fittings ceramic, wood collection

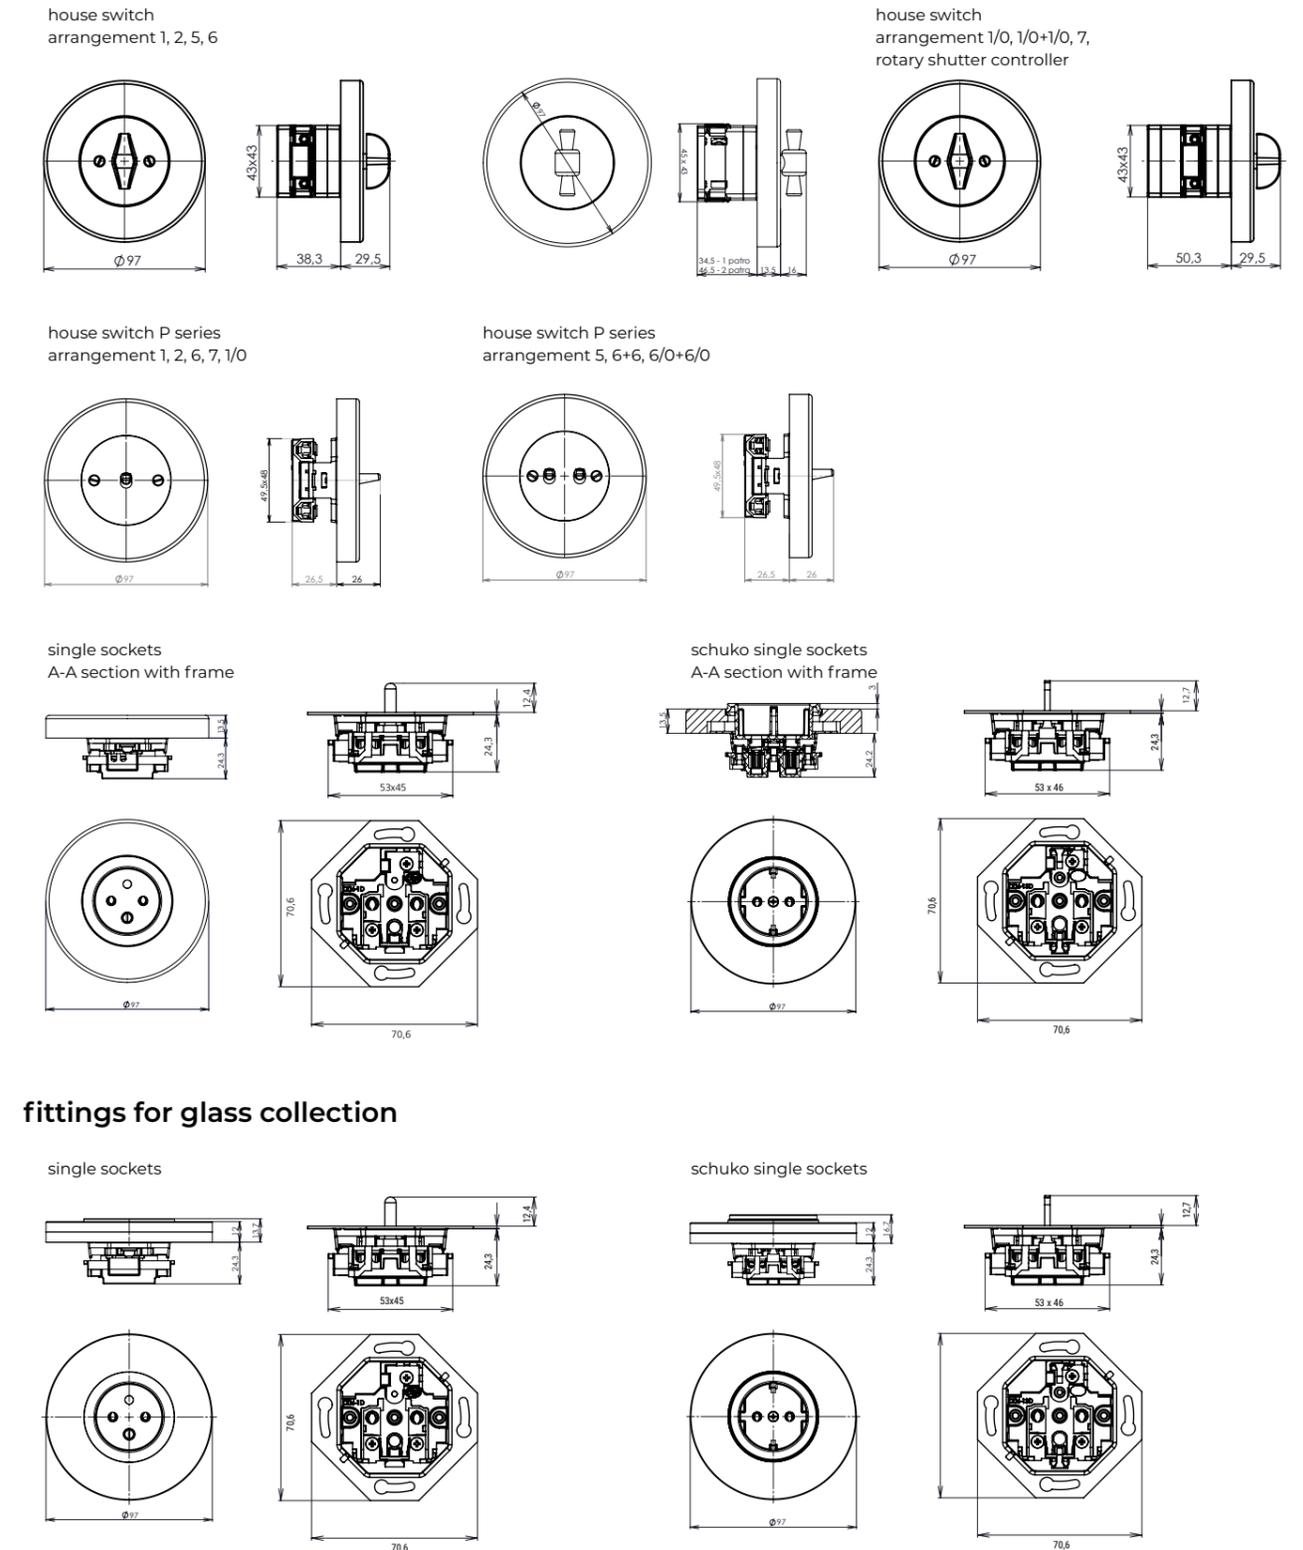


retro

fixtures


HDMI, USB,TV,SAT sockets




PC, RJ 45 sockets




sockets with USB-A charging




HDMI, USB,TV,SAT sockets glass




PC, RJ 45 sockets glass




sockets with USB-A charging glass




motion sensor B.E.G. glass, wood

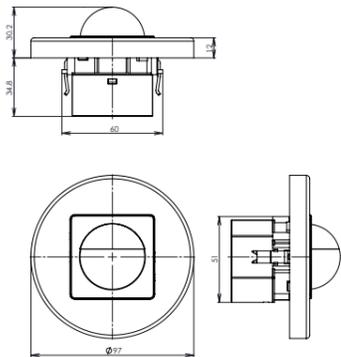

one level cam switch

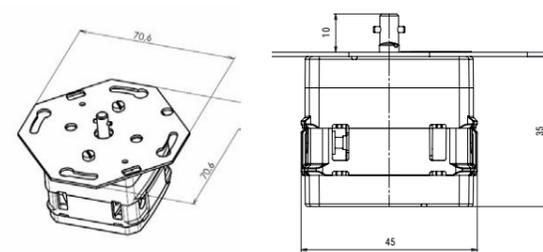


two level cam switch

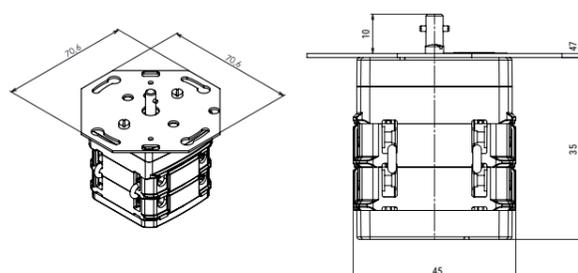

decente


frames

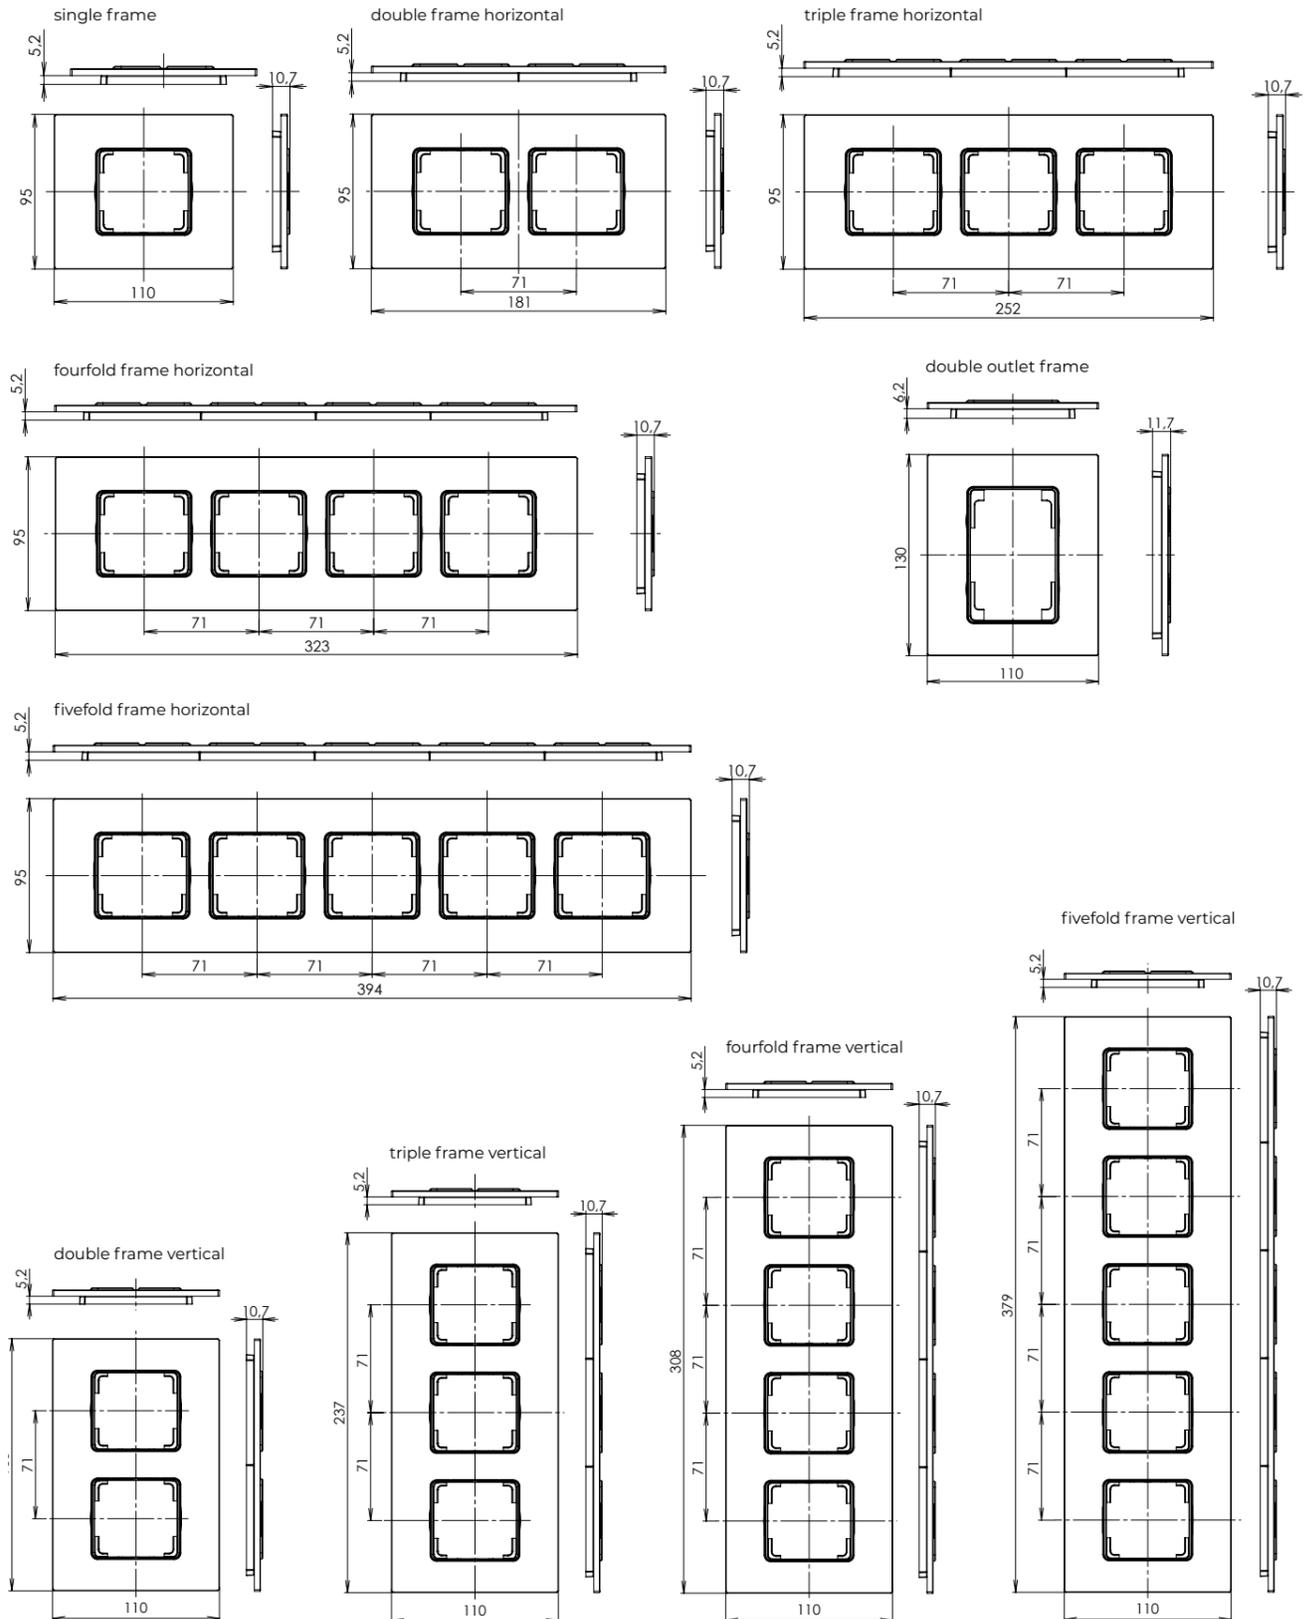


decente mini

frames


single frame




double frame horizontal

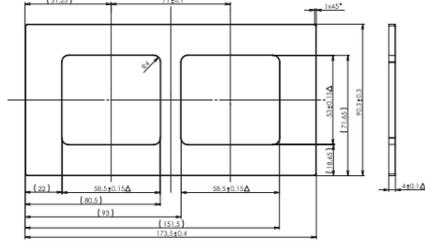


double outlet frame




triple frame horizontal

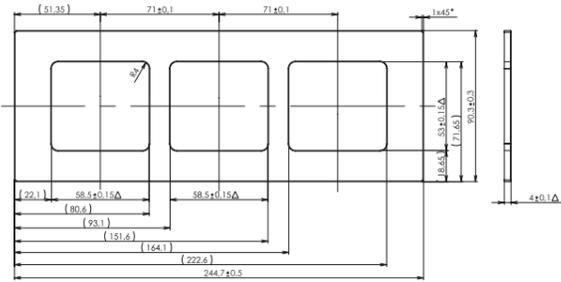

fourfold frame horizontal

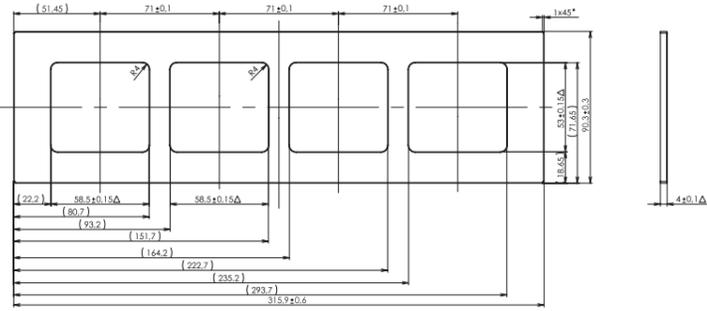


fivefold frame horizontal

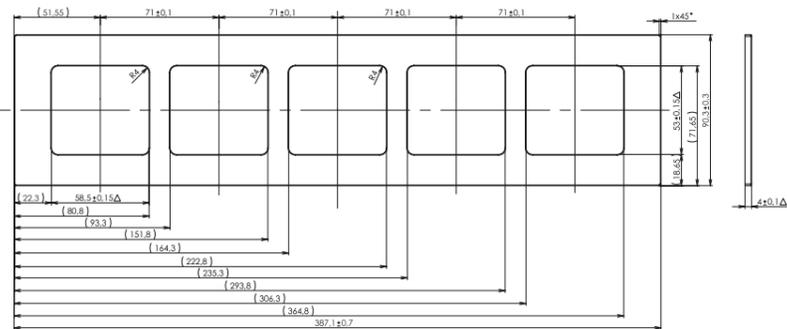


decente mini

frames


double frame vertical

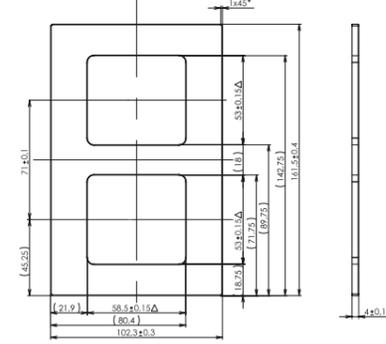


triple frame vertical

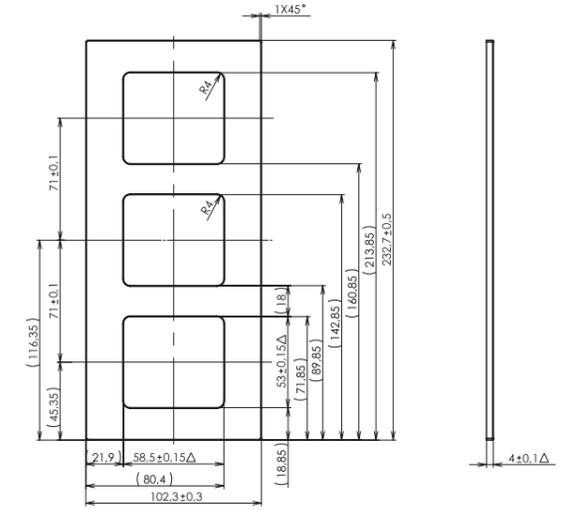

fourfold frame vertical

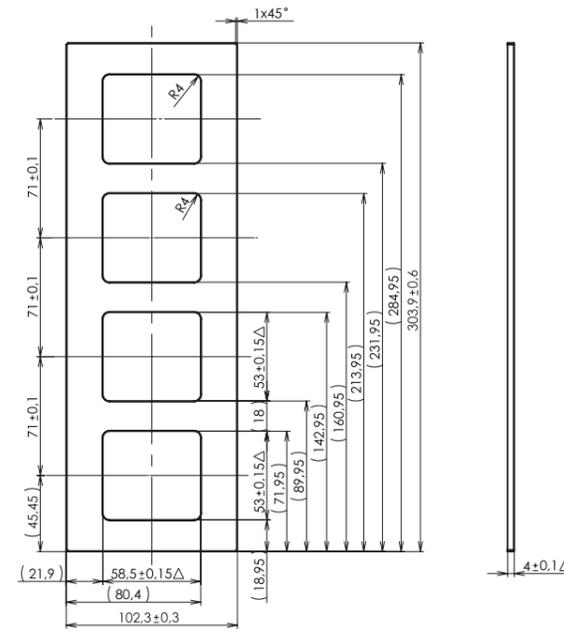


fivefold frame vertical

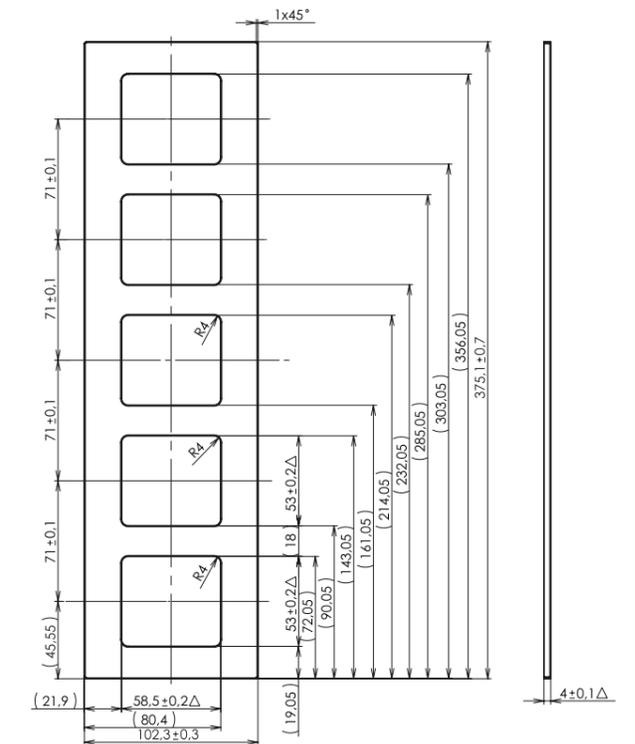


decente

fixtures


switch with single cover

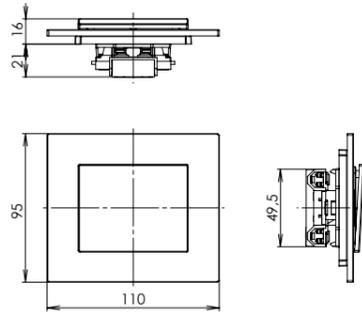


switch with single cover with backlighting

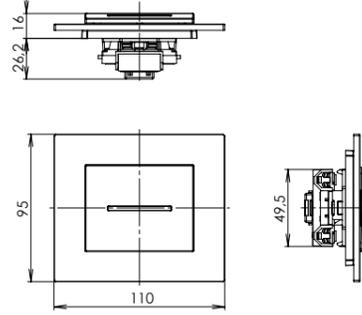


switch with double cover

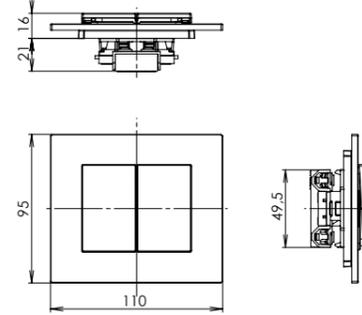


single sockets with safety shutters

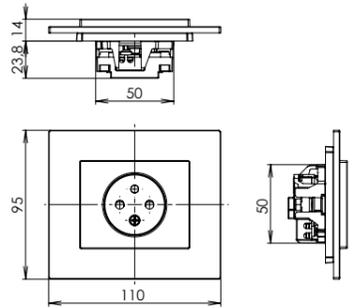


single sockets with safety shutters and overvoltage protection (light indication)

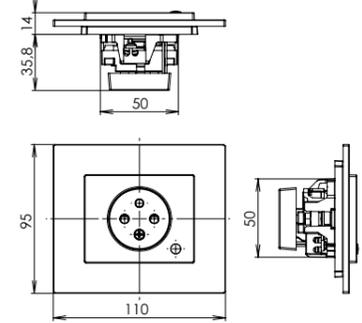


single sockets with safety shutters and overvoltage protection (audible alarm)

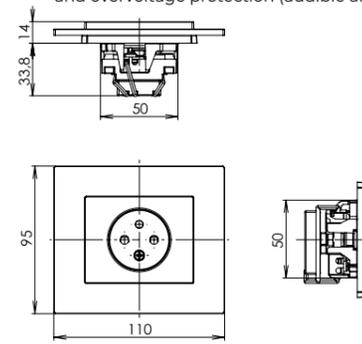

schuko single sockets with safety shutters

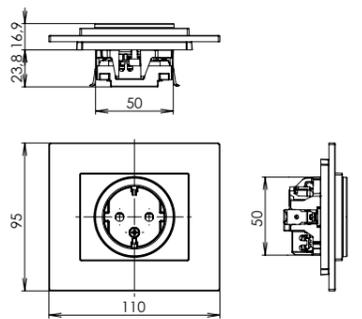


single sockets with safety shutters and overvoltage protection (light indication and audible alarm)

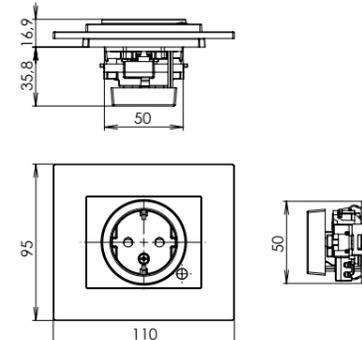

fixtures for glass collection


single sockets with safety shutters




decente

fixtures


double sockets with safety shutters

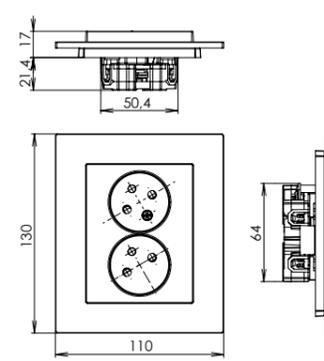


double sockets with safety shutters and overvoltage protection (audible alarm or light indication)

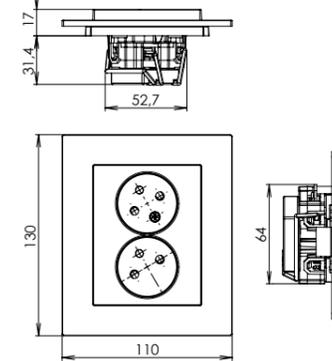

modular sockets USB with charger

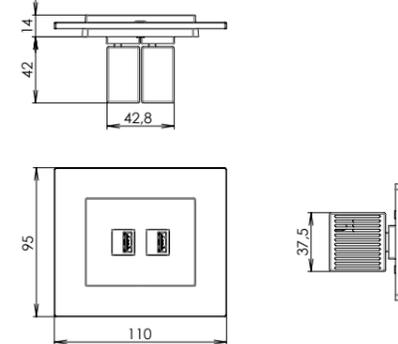


modular data sockets HDMI, USB, RJ45




decente

fixtures

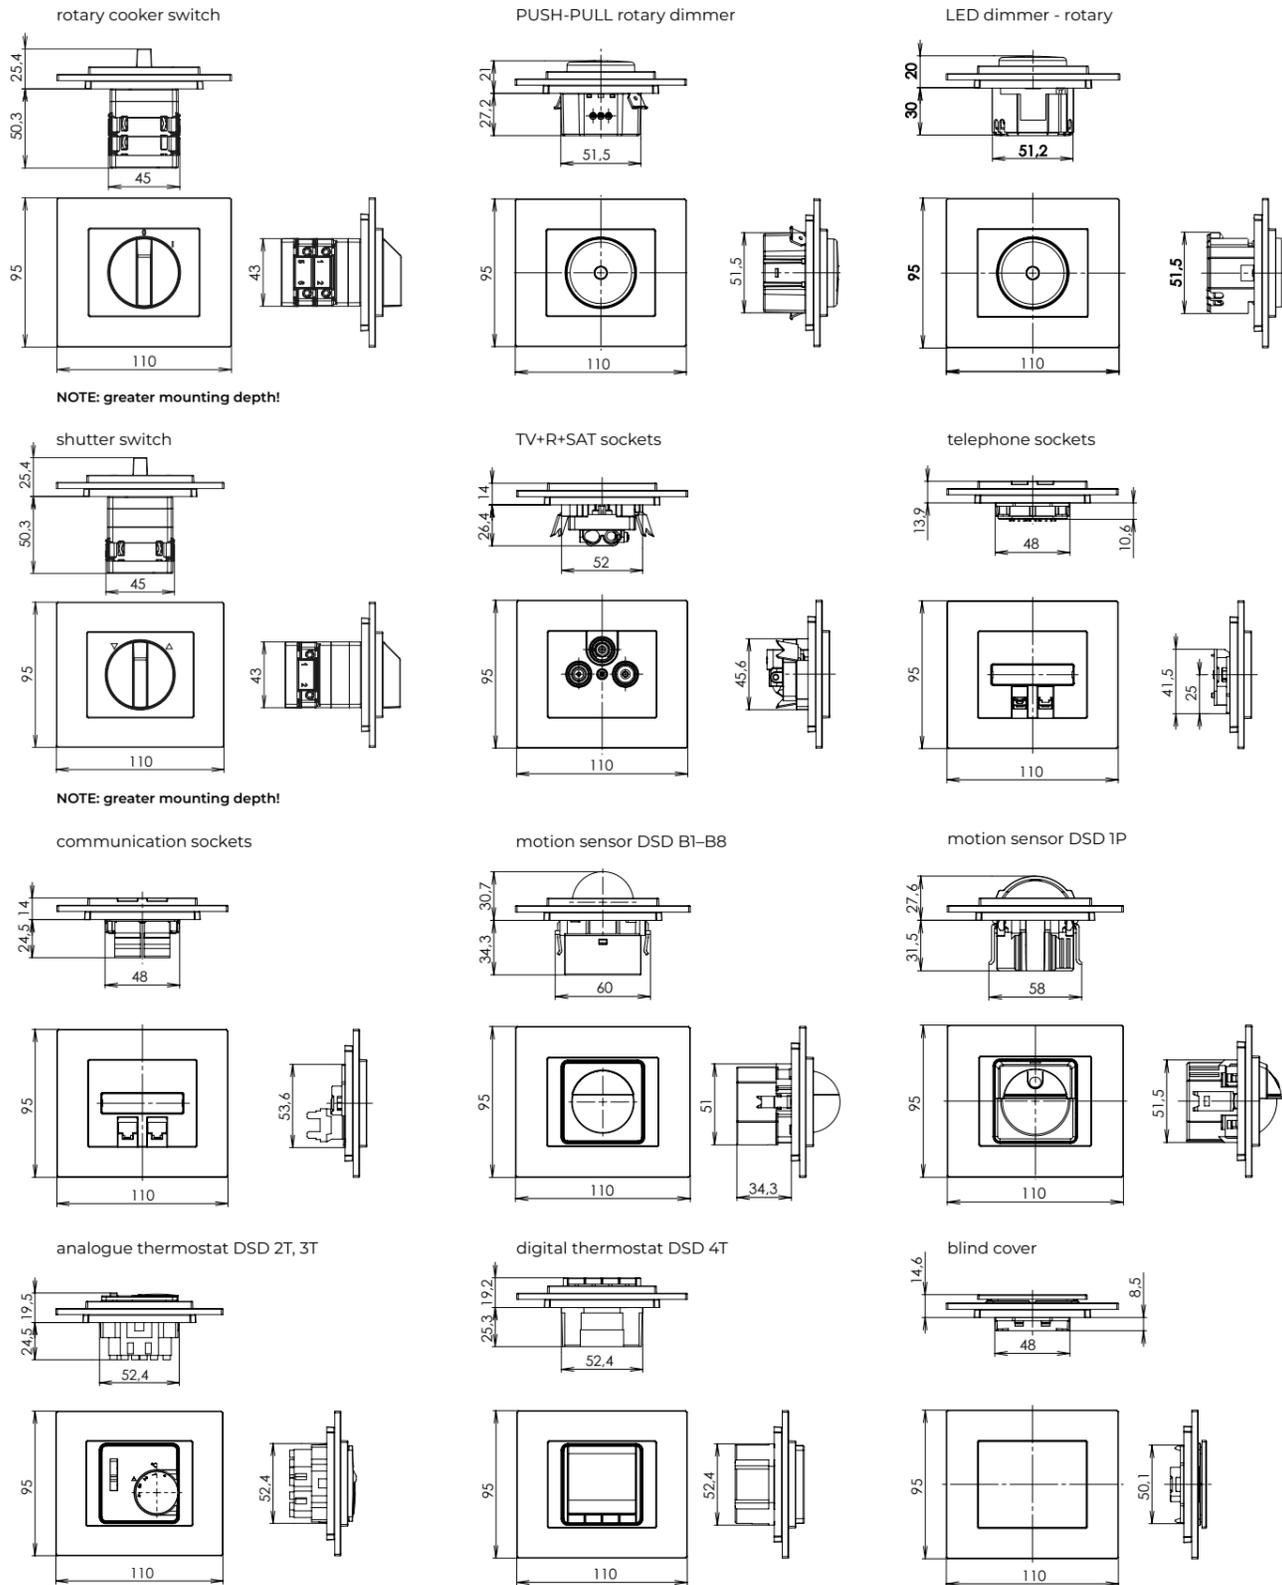

elegant


frames

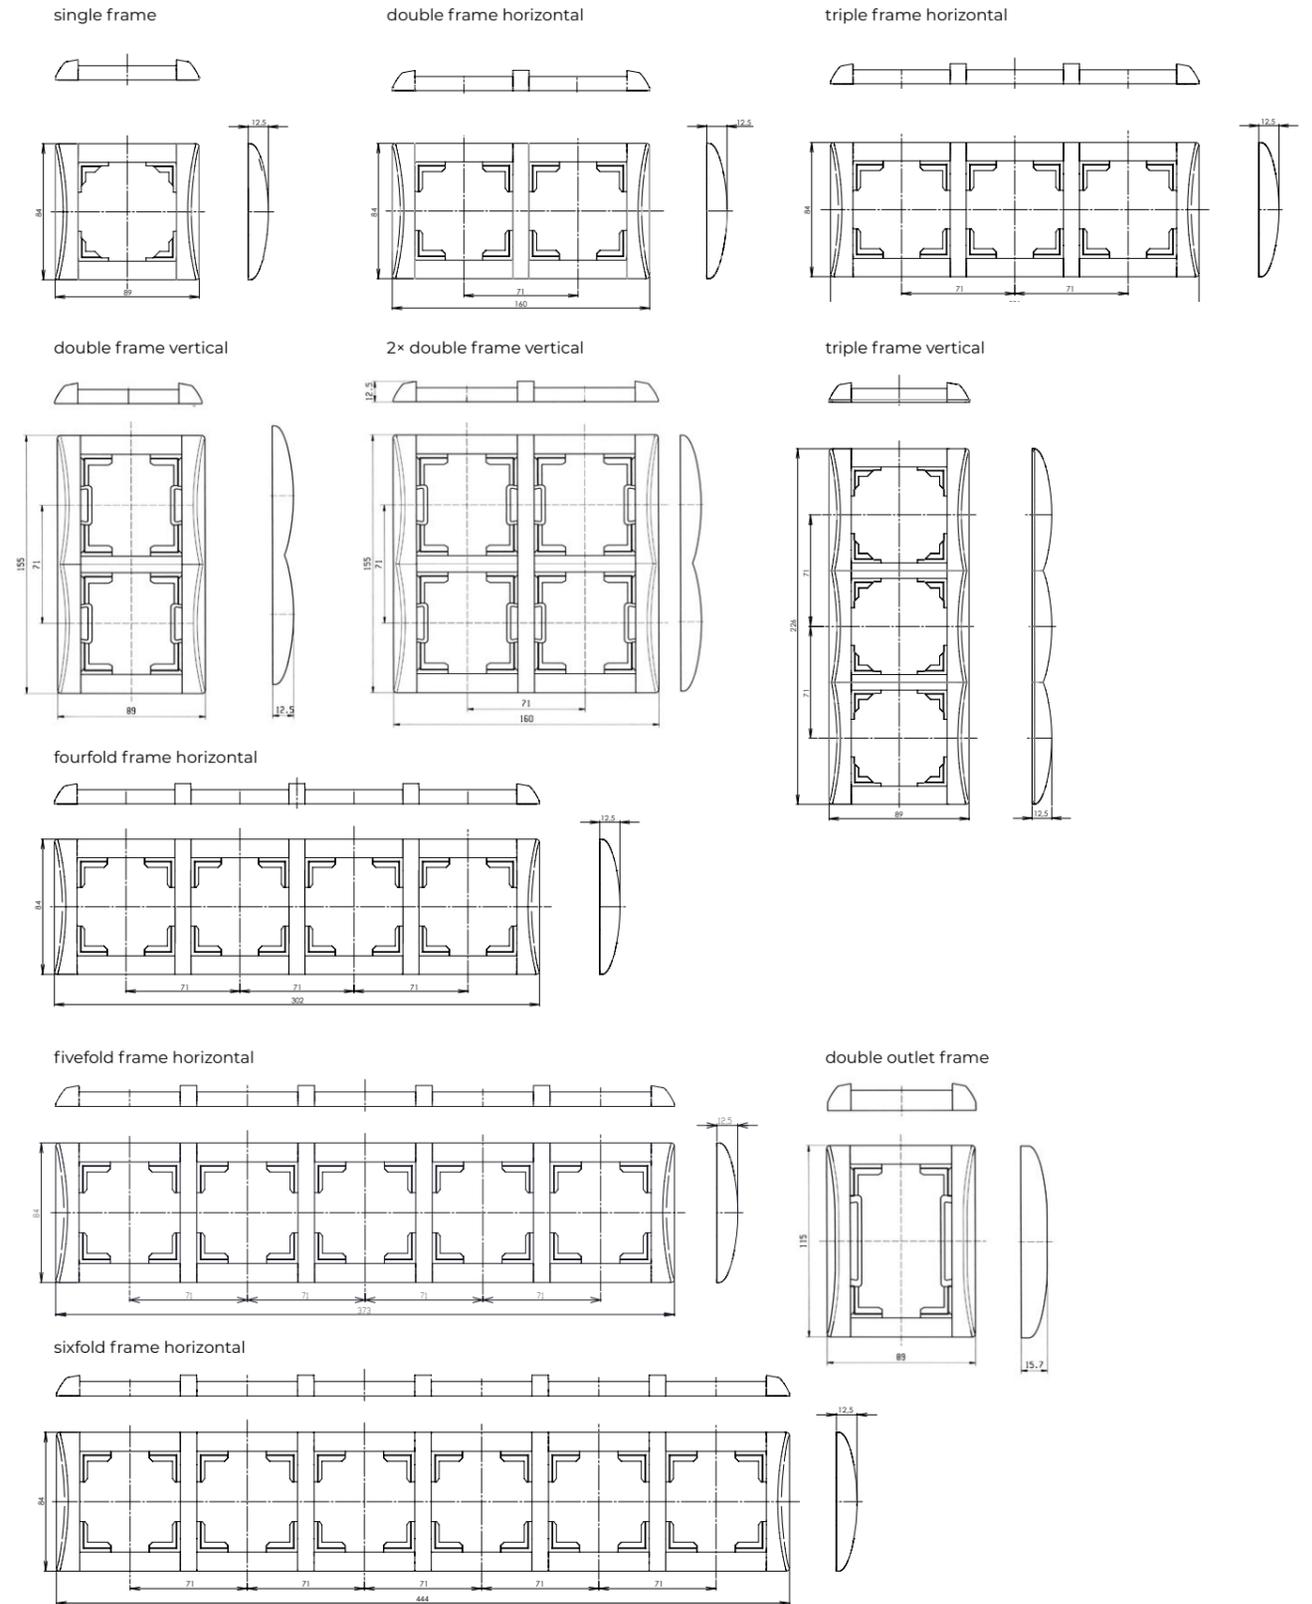


elegant

fittings


switch with single cover

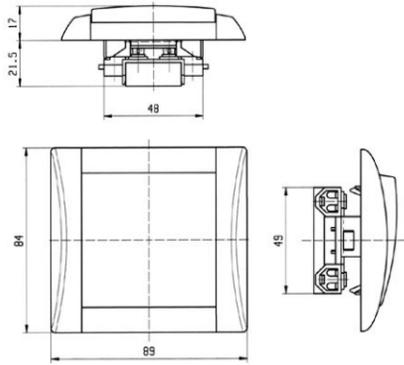


switch with double cover

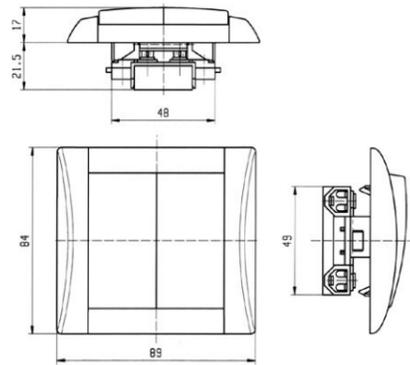


switch with triple cover

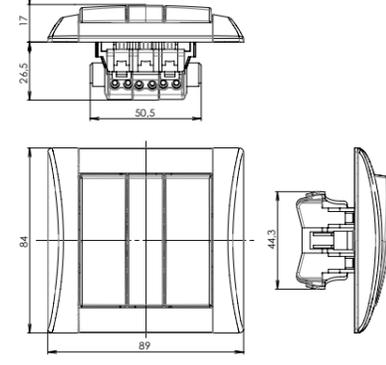


single sockets with/without safety shutters

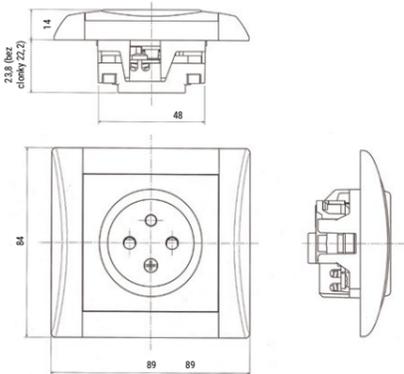


single sockets with overvoltage protection

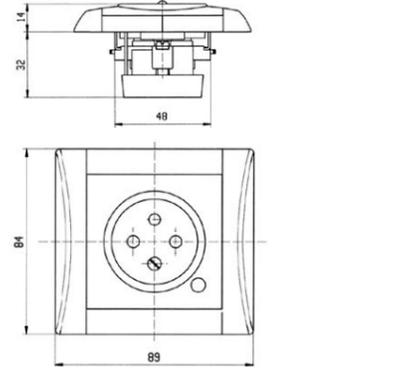


single schuko sockets

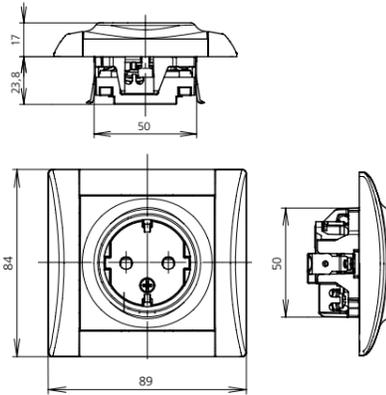


single schuko sockets with overvoltage protection (audible alarm)

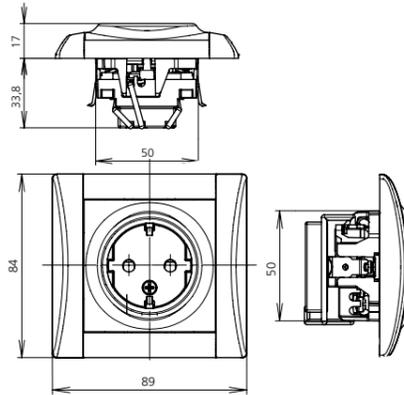

double sockets with/without safety shutters

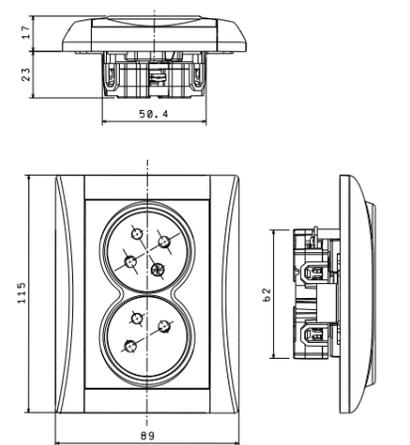

double sockets with overvoltage protection

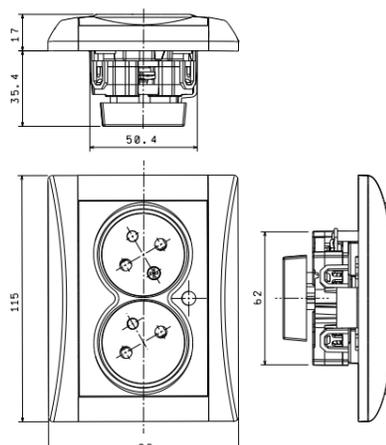


Double sockets must be installed in electrical installation no spout box at 6 and 12 o'clock.


elegant

fittings


IP 44 single sockets with a lid and safety shutters

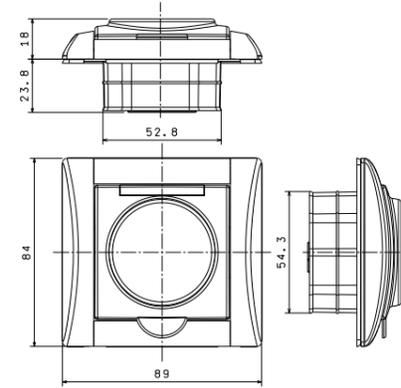


IP 44 switch with single cover

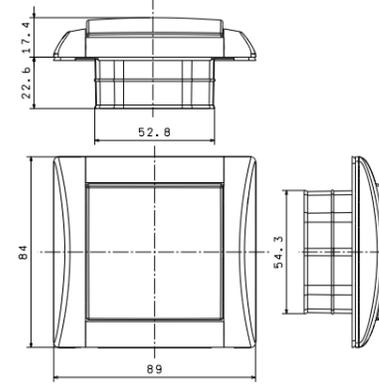


IP 44 switch with double cover

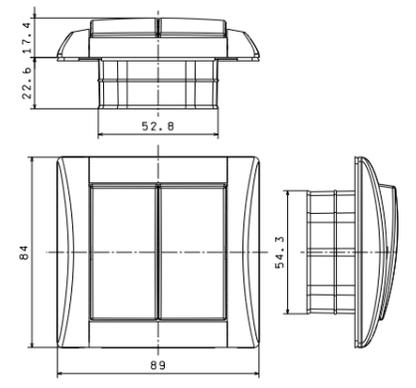


vacuum sockets

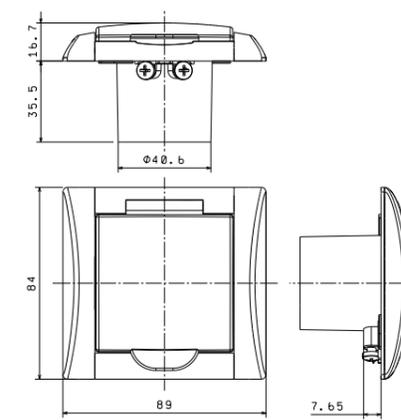

rotary cooker switch

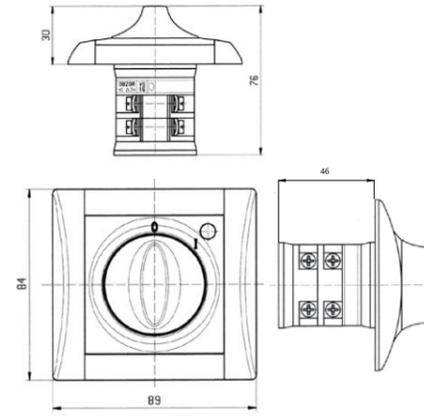


shutter controller

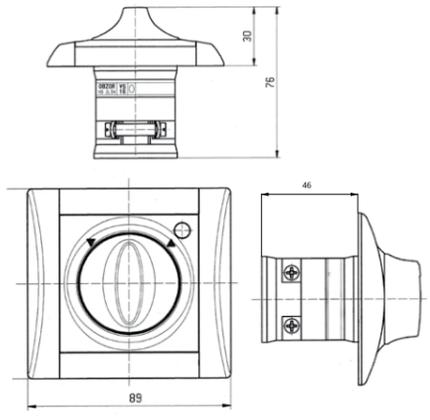


NOTE: greater mounting depth!

NOTE: greater mounting depth!


PUSH-PULL rotary dimmer switch

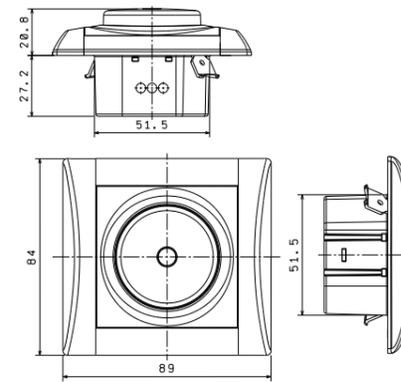

TV+R sockets

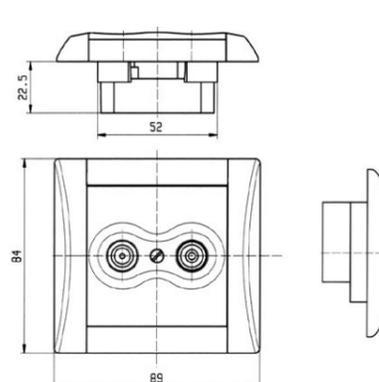



TV+R+SAT sockets

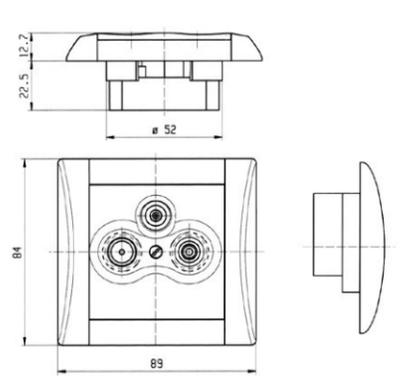



elegant

fittings



AUDIO-VIDEO sockets

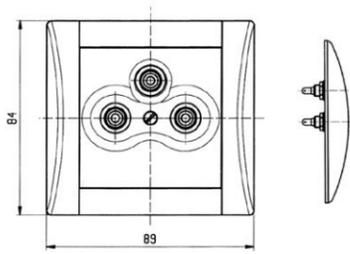



telephone sockets

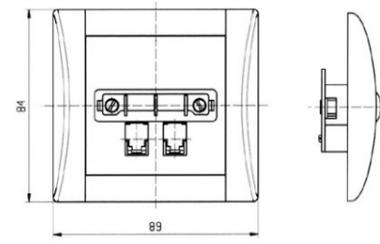



communication sockets

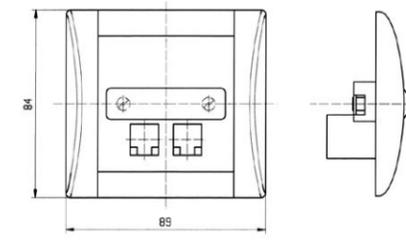



protective bonding sockets

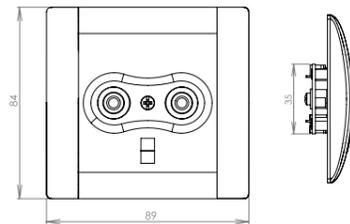



analog thermostat
OREG/EBERLE DSE 2T/3T

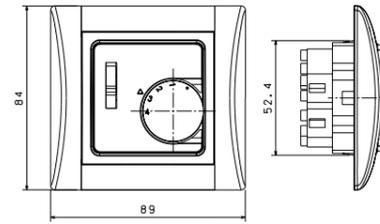



digital thermostat DSE 4T

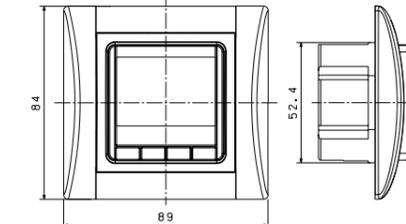

motion sensor STEINEL

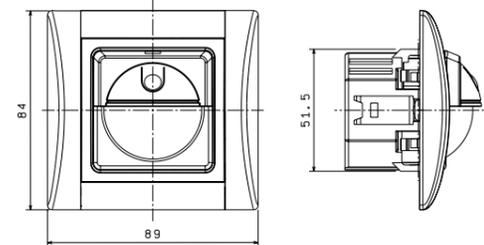


motion sensor B.E.G.

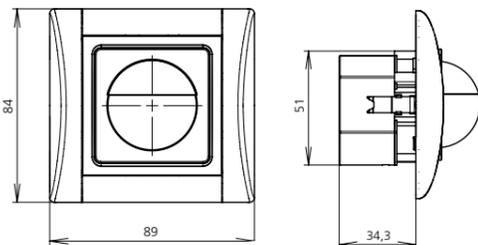


elegant

fittings


spacer ring VK1




spacer ring VK2



installation box, on-plaster

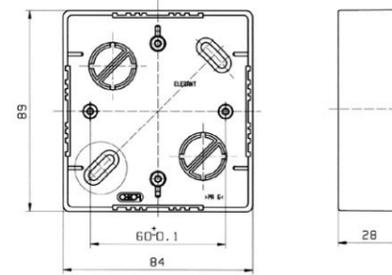

double sockets installation box,
on-plaster

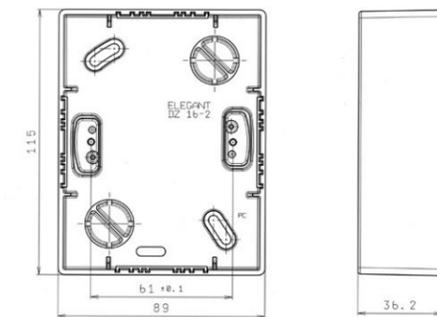

OBZOR



ESHOP

issue 01/2026, subject to change

OBZOR Zlín
Na Slanici 378
763 02 Zlín
Czech Republic

+420 577 195 138
+420 734 258 046
export@obzor.cz

obzorzlin.com
domovnivypinace.cz/en

